

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>G06F 19/00, G06G 7/66</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/59310</b> <b>(43) International Publication Date:</b> 30 December 1998 (30.12.98)
<b>(21) International Application Number:</b> PCT/US98/12986 <b>(22) International Filing Date:</b> 23 June 1998 (23.06.98)  <b>(30) Priority Data:</b> 60/050,538 23 June 1997 (23.06.97) US 09/ 23 June 1998 (23.06.98) US  <b>(71) Applicant:</b> THE CONSTRUCTION SPECIFICATIONS INSTITUTE [US/US]; 601 Madison Street, Alexandria, VA 22314-1791 (US).  <b>(72) Inventor:</b> HARTMAN, Linda, Marie; 3311 Lancer Drive, Hyattsville, MD 20782 (US).  <b>(74) Agents:</b> PIETRANTONIO, Frank et al.; Kenyon & Kenyon, 1025 Connecticut Avenue, N.W., Washington, DC 20036 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> METHOD AND APPARATUS FOR COMPUTER AIDED BUILDING SPECIFICATION GENERATION		
<b>(57) Abstract</b> <p>A method and apparatus for producing a design document for a product, with the product having product elements arranged in a hierarchical manner and stored in a relational database (128). A selection is received for at least one product element. At least one performance value associated with the selected product element is received. A text segment associated with each selected product element is retrieved from the database (128). Selected text segments are then used to construct the design document.</p> <div data-bbox="760 1171 1479 1871"><pre>graph TD; Start([Start]) --&gt; 302[receive a selection for at least one product element]; 302 --&gt; 304[receive at least one performance value associated with the selected product element]; 304 --&gt; 306[retrieve a text segment associated with each selected product element]; 306 --&gt; 308[receive a selection for at least one of the retrieved text segments]; 308 --&gt; 310[construct the document from the selected text segments]; 310 --&gt; End([End]);</pre></div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5       **METHOD AND APPARATUS FOR COMPUTER AIDED BUILDING  
SPECIFICATION GENERATION**

**CROSS-REFERENCES TO RELATED APPLICATIONS**

      This application claims the benefit of United States Provisional  
Application Number 60/050,538 titled "Method and Apparatus For Computer  
10 Aided Building Specification Generation" and filed on June 23, 1997.

**FIELD OF INVENTION**

      The invention relates generally to design systems. More specifically, the  
invention relates to design systems for the creation of product design documents.  
15

**BACKGROUND OF THE INVENTION**

      A planning process which involves multiple entities can be difficult to  
manage and coordinate, especially if there are one or more documents being  
passed between parties during the course of the process. This is the case with the  
20 construction and building industry. The planning which is required prior to the  
construction of a modern building is a labor intensive exercise, segments of which  
may be repeated several times during the process. When a prospective owner  
desires to build a building, using a design-builder delivery system, the owner's  
agents produce a request for proposal. The request for proposal (RFP) document  
25 which is distributed to potential design-builders includes the performance  
requirements for the building and the requirements for submitting a proposal.

      A design-builder entity then distributes the RFP to a design team of  
architects and engineers and a builder team. The design team is typically

responsible for designing the building in sufficient detail to begin actual construction of the building. These design details are embodied in construction drawings and specifications. The details for the building include specific features, materials, products, systems, schematic diagrams, and so forth. Using this design specification, the builder team may produce a financial document  
5 estimating the cost of the project and a construction schedule. At this point, if financial projections exceed the allocated budget, another iteration of the design may occur in an attempt to produce a design-builder proposal which is financially commensurate with the RFP. When the financial document and the design specification are satisfactory to the design-builder entity, the documents are  
10 combined into a design-builder entity proposal which is submitted to the prospective owner.

At this point the agents of the owner compare the design-builder proposal with the RFP and based upon the findings of the design teams, a decision is made as how to proceed. The decision at this point may be not to proceed, to issue  
15 another RFP, to negotiate specific changes in the proposal or to accept the design-builder proposal. Thus at several stages in the planning, many segments of the planning may be redone multiple times in an attempt to meet certain constraints.

In an attempt to reduce the amount of work required for this labor intensive process several systems have been developed which attempt to automate  
20 segments of the planning process. For example, Computer Aided Design (CAD) programs reduce the time required to create or change the schematic designs, while specification and estimator programs reduce the time necessary to create or change the textual portions of the proposal based upon the materials specified by the designers.

25 In view of the foregoing, it can be appreciated that a substantial need exists for a method and apparatus which solves the above-discussed problems, more specifically, to more efficiently allow multiple entities to work together while passing one or more documents between the entities.

## 30 SUMMARY OF THE INVENTION

One embodiment of the invention includes a method and apparatus for producing a design document for a product, with the product having product elements. Data representing the product elements can be arranged in a hierarchical manner and stored in a relational database. In producing the design document, a selection is received for at least one product element. At least one  
5 performance value associated with the selected product element is received. A text segment associated with each selected product element is retrieved from the database. Selected text segments are then used to construct the design document.

In another embodiment of the invention, a first entity (e.g., an owner entity) constructs a first overlay for the design document using a first design-build  
10 device. An overlay is a template for the relational database. The first overlay is sent to a second design-build device. A second overlay for the design document is received from the second device. The second overlay includes the first overlay and any modifications made to the design document by a second entity (e.g., a design-build entity). A first and second set of data from the database  
15 corresponding to the first and second overlays, respectively, are retrieved and displayed for review by the first entity. The first or second entity can then create a third overlay including the first and second overlays and any further modifications for the design document, and send the third overlay to a third design-build device for review by a third entity (e.g., a materials supplier).

20 With these and other advantages and features of the invention that will become hereinafter apparent, the nature of the invention may be more clearly understood by reference to the following detailed description of the invention, the appended claims and to the several drawings attached herein.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a design-build system in accordance with one embodiment of the invention.

FIG. 2 illustrates a hierarchical model suitable for use with one embodiment of the invention.

30 FIG. 3 is a block flow diagram of the steps performed by a design-build

system in accordance with one embodiment of the invention.

FIG. 4 illustrates various overlays in accordance with one embodiment of the invention.

FIG. 5 is a block diagram of a design system in accordance with one embodiment of the invention.

5        FIG. 6 is a block flow diagram of the steps performed by a design system in accordance with one embodiment of the invention.

FIG. 7 is a block diagram of a design system having multiple design-build entities in accordance with one embodiment of the invention.

## 10    DETAILED DESCRIPTION

One embodiment of the invention comprises a method and apparatus for producing design documents in accordance with a particular industry, such as the construction industry, aerospace industry, automotive industry, computer and telecommunications industry, and so forth. For illustrative purposes only, this  
15    embodiment of the invention will be described in terms of the construction industry. The term "construction industry" refers to the industries whose chief businesses are the design, demolition, construction, reconstruction, life-cycle management, or renovation of buildings; the infrastructure serving buildings; and transportation and utility infrastructures. The structures produced or designed in  
20    the construction industry may be land-based, marine based, or space-based. Building types referenced under the definition of "buildings" include: General Buildings (e.g., buildings constructed to house commercial, educational, and medical activities, offices, stores, hotels, and housing of all types); Manufacturing Facilities (e.g., buildings constructed to house manufacturing or  
25    assembly of automobiles, textiles, electronics, etc.); Transportation Facilities (e.g., buildings required for the functioning of transportation systems, such as airports and train stations); Industrial Processing Facilities (e.g., buildings constructed to house pulp and paper, steel and other metal production operations, metal refineries, chemical, pharmaceutical, and food and other processing plants,  
30    etc.); Non-vehicular Space Facilities (e.g., facilities constructed primarily to

house persons living and working in space, to enable the exploitation of extraterrestrial resources, and to house extraterrestrial manufacturing operations, etc.). Infrastructure types referenced under the definition of infrastructure serving buildings include electrical power and communication lines, water and waste lines, gas and other utility lines. Transportation and Utility Infrastructures include: Ground and Underground Transportation Infrastructure (e.g., roads, bridges, railroads, tunnels, over- and under-passes, etc.); Power Production and Transmission Infrastructure (e.g., thermal and hydroelectric power plants, waste-to-energy and co-generation plants, and auxiliary substations, transformers, transmission lines, etc.); Water Supply Infrastructure (e.g., dams, reservoirs, pumping stations, distribution pipelines, irrigation canals, desalination and potability treatment plants, etc.); Sewerage/Solid Waste Management Infrastructure (e.g., sanitary and storm sewers, treatment plants, pumping stations, incinerators, industrial waste facilities, etc.); Hazardous Waste Treatment/Abatement Facilities (e.g., facilities for the storage, containment, and/or detoxification of asbestos- and lead-contaminated waste, chemical and nuclear contaminants, etc.); Waterways and Marine Infrastructure (e.g., canals, locks, marine dredging facilities, piers, sea-based oil rigs, ship-building facilities, etc.); and Mining and Refineries (e.g., underground and strip-mining facilities, petrochemical plants, petroleum refineries, offshore mining or drilling facilities and auxiliary pipelines. Although this embodiment of the invention is described with reference to the construction industry, however, it can be appreciated that the principles and concepts outlined in terms of the construction industry may be equally applied to other industries and still fall within the scope of the invention.

It is worthy to note that any reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

One embodiment of the invention comprises a system that enables a first

entity (e.g., prospective owner) to produce an RFP that describes building facility requirements in performance terms for design-build or other construction projects ("design-build system"). The design-build system then permits a second entity (e.g., design-builder) to generate a design-builder proposal based upon the RFP. In other words, the proposal is generated using the performance-based description or specification of the proposed building and its requisite site work. In addition, the system permits the design-builder entity, the prospective owner, or other contractor to generate performance specifications for use by a construction team.

Referring now in detail to the drawings wherein like parts are designated by like reference numerals throughout, there is illustrated in FIG. 1 a design-build system in accordance with one embodiment of the invention. As shown in FIG. 1, a design-build system 100 comprises a processor 102, a memory 104, and a bus adapter 114, each of which is connected to a processor/memory bus 116 and an Input/Output (I/O) bus 118 via bus adapter 114. Further, design build system 100 contains a network interface 122, mass storage device 124, monitor 126, and database 128, each of which is connected to I/O bus 118 via an I/O controller 120.

In this embodiment of the invention, design-build system 100 is a microprocessor-based personal computer (PC) system. Memory 104 may be any suitable computer readable memory device such as one or more dynamic random access memory (DRAM) devices. Mass storage device 124 may be any suitable computer-readable storage means for storing digital signals such as magnetic storage media (i.e., a magnetic disk), optical storage media (i.e., a CD-ROM or Digital Video Disc), and so forth. Further, design-build system 100 may contain various combinations of machine readable storage devices through other I/O controllers, which are accessible by processor 102 and which are capable of storing digital signals. Network interface 122 may be any suitable means for controlling communication signals between network devices using a desired set of protocols, services and operating procedures. Those skilled in the art will understand that the communication signals may be received over any suitable medium such as twisted-pair wire, co-axial cable, fiber optics, radio-frequencies,



and so forth. Processor 102 may be any suitable means for performing the functionality for various embodiments of the invention, and is preferably a general purpose microprocessor such as the Pentium®, Pentium Pro, or Pentium II made by Intel Corporation. Monitor 126 may be any means for displaying analog signals, such as a variable graphics array (VGA) monitor. I/O controllers 5 120 may be any means for controlling the flow of information between I/O bus 118 and various I/O devices such as network interface 122, mass storage device 124, monitor 126 and database 128. Bus adapter 114 may be any means suitable for transferring data back and forth between processor/memory bus 116 and I/O bus 118. Design system 100 is non-operating system dependent and in one 10 embodiment functions with Windows 3.1, 3.11, Windows 95, or Windows NT.

Memory 104 stores computer program segments that a processor (e.g., processor 102) executes to perform the functionality for this embodiment of the invention. These computer program segments are separated into two modules, that is, a design module 106 and a relational database management (RDM) 15 module 108. It can be appreciated, however, that the functions performed by these modules can be further separated into more modules, combined together to form one module, or be distributed throughout the system, and still fall within the scope of the invention. Further, although this embodiment of the invention implements the functionality of these modules in software, it can be appreciated 20 that the functionality of these modules may be implemented in hardware, software, or a combination of hardware and software, using well-known signal processing techniques. The operation of these modules will be described in further detail later with reference to FIG 3.

In this embodiment of the invention, database 128 is a relational database 25 storing data in hierarchical form. The data is extracted from database 128 by relational database management module 108. Design module 106 is used to organize data from the database into various design documents and overlays consistent with one or more performance terms.

Database 128 is a relational database storing information in a hierarchical 30 format. Individual "cells" of information are stored in the database, with each

cell being connected to other related cells (e.g., peer cells, child cells and parent cells) by a link or pointer. The information within a cell and its links varies according to a particular product or system that is being designed. The product is broken down into separate components, with the components being broken down into separate elements, and so forth in a hierarchical manner to whatever level of  
5 granularity is desired. Each discrete part of the product is uniquely identified, and is referred to herein as a "product element." Each product element is stored in an individual cell used by database 128. An example will be described with reference to FIG. 2.

FIG. 2 illustrates a hierarchical model suitable for use with one embodiment  
10 of the invention. One example of a product that may be broken down into its product elements and organized into a hierarchical structure is a building. A building can be defined according to major construction assemblies which are arranged as a hierarchical relational list of building assembly descriptions of increasing specificity. At the highest level of the list is a facility description in  
15 substantially the broadest performance terms possible. Thus at the top of the hierarchy (Level One) is an element by element list of the major assemblies of all buildings, such as shell, services, interiors, and equipment and furnishings. The next level (Level Two), in one embodiment, describes systems within an assembly, as shown in FIG. 2. Thus the building shell element is described in  
20 terms of exterior enclosure and superstructure elements. Level Three of specificity describes different sub-systems of each system, for example, exterior walls, and exterior windows and other openings. Below this level (Level Four), the data include specific components such as windows, fixed glazing and ventilation openings. Finally, at the lowest level in this embodiment (Level  
25 Five), building elements such as operable windows, entrances and storefronts, and louvers, are included. In each case, the elements are described in terms of their performance.

In this embodiment of the invention, a building is decomposed into various product elements in a manner similar to an industry standard format promulgated  
30 by the Construction Specifications Institute (CSI) and Construction Specifications

Canada (CSC) and referred to as the CSI/CSC 1997 Draft UniFormat ("UniFormat"). It is worthy to note that although UniFormat was used to define product elements in this embodiment of the invention, any hierarchical definition of product elements can be used and still fall within the scope of the invention, such as the CSI/CSC 1998 version of UniFormat.

5        Each cell can contain many types of information or attributes to characterize a product element, such as a performance value, text segment, identifier, and so on. A performance value may be a qualitative or quantitative parameter. Examples of qualitative parameters might be that the building must conform to certain architectural requirements for a particular area, have a non-combustible  
10    outer shell, or that each product element must be aesthetically consistent with a brick facade. Examples of quantitative parameters might be an overall seismic resistance of the building, a value for thermal resistance for an exterior wall, a value for glass transmittance, and so forth. A text segment is defined as one or more words, phrases, or sentences which can be combined together to produce a  
15    particular document. In this embodiment of the invention, the text segments describe a building's technical requirements and, along with the performance values, are used to produce performance-based specifications for the building's systems and elements.

      The organization of product elements in a hierarchical manner serves at least  
20    two purposes. First, it creates a standard format and terminology that can be used to enhance communications between multiple entities. Second, it permits an entity to define a product in performance terms, thereby permitting multiple entities to build upon each other's work in a consistent and uniform manner. Both purposes will become more apparent during the description of the operation  
25    of design-build system 100, which occurs in the following sections.

      FIG. 3 is a block flow diagram of the steps performed by a design-build system in accordance with one embodiment of the invention. Design-build system 100 is capable of producing a design document for a product, with the product having product elements arranged in a hierarchical manner. System 100  
30    receives a selection for at least one product element at step 302. System 100 also

receives at least one performance value associated with the selected product element at step 304. System 100 then retrieves a text segment associated with each selected product element at step 306. A user selects which of the retrieved text segments are to be incorporated into the document at step 308. System 100 constructs the document using the selected text segments at step 310.

- 5 Referring again to the building industry, design-build system 100 permits a prospective owner to utilize the least detailed level of performance requirements compatible with the owner's needs. Thus for an advantageous design-build project, performance requirements of the RFP are described at the highest level. A prospective owner needing a greater degree of control over the finished product
- 10 might describe needs at a higher level of specificity. Such an arrangement of the database enables the design-builder to improve upon the work of the owner and describe the proposed design solution in greater detail than the owner used to describe the requirements, still in performance terms, by drawing upon data from an appropriate level of the database. If the prospective owner's requirements
- 15 statement is produced at the most detailed level available in the database, the design-builder may then produce a proposal in prescriptive terms.

Design-build system 100 permits different levels of specificity to be used to describe different parts of the building project. For example, a prospective owner may stipulate very general performance requirements for an element, for example

20 a substructure, in combination with very detailed requirements for some other building components, for example particular interior finishes.

A user of the system produces a product description by choosing from the product elements offered from the database, and occasionally by adding to them. By selecting the desired elements, paragraphs of text describing the elements are

25 accessed from the database. This text may then be edited as desired. Relational links between the elements, and hence among paragraphs of text are arranged to discourage incompatible choices or automatically include collateral requirements once basic decisions are made. Selectable system parameters allow the user to make global choices among printed-page formats and other features, such as units

30 of measure and have those choices propagated through the document. Associated

with each option are help screens to accompany complicated text to be selected. In addition, the system is configured to permit evaluation of a proposal's solutions by performing an automatic comparison of the requirements at the present level with the requirements at a higher level.

In operation, to prepare a project document, the user first selects a project or starts a new project. From the project window, a table of contents is displayed and is organized by "volumes," which correspond to the assemblies of the product, general information about the project, and contractual information. The user can thus determine at a glance what assemblies have been included in the project. From this window, the user selects additional chapters to be included in the project. By selecting, for example by using a mouse, a chapter number or title, the data set level corresponding to the selected chapter is opened.

Text from the database is retrieved and can be scrolled and viewed like any document. However, in one embodiment, the text is not displayed like a document in a normal word processing environment. In this embodiment, each paragraph is in a text cell, similar to a spreadsheet, except that the text cell occupies most of the screen width. In this embodiment, and referring to the figures, the text hierarchy for each paragraph occupies a cell at the left edge of the screen. The current status of each paragraph is displayed, indicating whether it will be printed in the final document or not. Text that the user has selected is marked with an X. In addition, color coding of the text indicates how the text in the cell relates to other text in the document. In one embodiment, text that has been selected by the system is marked with a green box; text that is suggested as relevant by the system is marked with a yellow box; text that has been excluded by the system is marked with a red box; text that the user has excluded has half the status box blacked out.

Unlike documents from a typical word processing environment, chapters and projects in the present system feature "intelligent text." In order to create an edited document, the user selects text from the database and as the user makes text selections, the program automatically makes other changes to the chapter and to other chapters in the project as would occur in a spreadsheet rather than a

word-processing environment. Only valid active text, selected by the user or included automatically by the program, will be assembled into the final output. To be active, selected text must have an unbroken line of parentage originating with the chapter title. This means that any "orphaned" text, text whose pointers can not be retraced to the origin, will not be part of the final printed document.

- 5 From a main File menu, the user opens a Summary Information dialogue box. Here the user is able to make a number of global decisions that will affect how the document is formatted. The user is able to establish the units of measure to be used, the terms to be used for key entities, and other variables. The data in the database includes certain associated information in order for these global
- 10 variables to function as desired. For example:

	<u>VARIABLE</u>	<u>EXAMPLE</u>
	Document function	RFP, Proposal or Instructions
	Unit of measure	English or metric
15	Owner term	"owner" or "government"
	Design-builder term	name of the design builder
	Design professional term	name of
	Contractor term	name of contractor
	Project location (State)	state
20	Edition date (of standard)	date

- The switch "Document Function" permits the user to be able to define the function of the document once, changing all relevant language to reflect that function. In one embodiment, the values for the three functions are: Request for
- 25 Proposal, Design-builder's Proposal, or Instructions for Construction. By selecting one of these values, the relevant language will be inserted globally into the text of the RFP or the proposal by the software.

- The switch in the project summary dialogue box will set the appropriate option by selecting option 1, 2, or 3, designating whether the document is to
- 30 serve as an RFP or a proposal or instructions for construction. Samples of alternative language are as follows:

For an RFP: "Design and select materials to provide"

For a proposal: "Construction will provide"

If instructions for sub-contractor: "Provide"

User options and global settings have been coded in the sample text the same way  
5 they would need to be coded for conversion by the content provider. Below are  
additional coding conventions that are used within the sample:

Owner's Criteria Documents: Comply with applicable requirements of the  
following:

- 10        1.    BOCA National --and <<Building Code>> <<Fire  
                 Prevention Code>> <<Energy Conservation Code>>  
                 <<[ ]>>--.
2.    ICBO Uniform --and <<Building Code>> <<Fire Code>>  
                 <<[ ]>>--
- 15        3.    SBCCI Standard --and <<Building Code>> <<Fire  
                 Prevention Code>> <<Existing            Building Code>>  
                 <<[ ]>>--.
4.    CABO Model Energy Code.
5.    [ ].
- 20        6.    [ ].

Within the database, a given paragraph (source paragraph) may be  
relationally linked to any number of other paragraphs (target paragraphs) both  
within the chapter and in other chapters. Only one link may exist from any  
25 source paragraph to a given target paragraph, but any paragraph may be the target  
of any number of links from multiple source paragraphs. Also, the links act in  
one direction only and do not result in reciprocal linkage. For example, a  
paragraph that automatically selects another paragraph will not be selected  
automatically if the target selection is chosen first; a separate link acting in the  
30 opposite direction would be necessary. In addition, the target paragraph may act  
on the first paragraph in a different way altogether, or not at all.

The presence of the type of link determines whether text is selectively  
excluded or flagged as pertinent. Because a given target paragraph may be acted

upon by several links of different types (from a number of source paragraphs), the text status and related display modes are governed by a hierarchy of consequences resulting from a selection. Specifically:

1. Any text may be selected manually at any time, which overrides any links.
2. Any text may be excluded manually at any time, which also overrides any links.
3. If not selected or excluded manually but acted upon by one or more links of the same type, the status will correspond to that associated with the link type: (Yes, No, or flagged as pertinent).
4. If not selected or excluded manually but acted upon by more than one type of link, text status will be determined by the following hierarchy, from most to least controlling: (No, Yes, flagged as pertinent).
5. If not selected, excluded, or acted upon by any links, the text will be available for selection by the user.

Thus, a single "No" link will override any number of "Yes" or flagged links and a single "Yes" link will override any number of flagged links. Also, because status of a particular paragraph is dependent upon the net effect of all currently active links, removal of a particular link by deselection of the source text may result in a change in the status of the target paragraph. The software calculates the current status of each paragraph after each change in status of any paragraph and displays the active paragraphs on a white background for ease of identification.

The data format (in one embodiment CSI's UniFormat as adapted) accommodates virtually any type of building. In one embodiment, the content for a North American commercial project in a temperate or tropical climate, includes the International Conference of Building Officials (ICBO), Building Officials and Code Administrators International, Inc. (BOCA), or Southern Building Code Congress International, Inc. (SBCCI) model building codes either as regulatory requirements or incorporated by reference into the requirements. This code assumption provides a body of basic performance requirements which does not



need to be repeated in the database. In other embodiments Canadian and major State codes are included.

The first display screen of the database is arranged as a series of "tabs" denoting major document volumes. The volumes start with 0 for Project information; tab A through G for the major building and site elements; tab X, referred to as volume X, which includes product information organized into 16 divisions, and a final tab Z, which includes contract information. In one embodiment the Master Format of the Construction Specification Institute is used to organize the contents of volume X. The hierarchical levels are referred to as assemblies (Level 1), systems (Level 2), subsystems (Level 3), and components (Level 4). Within each volume are chapters that may be used as separate documents. That is, chapter 0 contains the overall project description and the most fundamental performance requirements. Volumes A-G and 0 correspond to Level 1.

The first chapter in each volume contains the requirements that need to be defined at the assembly level. A requirement is defined at the volume or assembly level if the requirement can be stated as "All \_ [a] must be [b] \_" or "No \_ [a] - may be \_[b] \_" where [a] is the name of the volume and [b] is the requirement. For example, if the entire shell of the building must be non-combustible, that would be stated at the assembly level in [b], assuming that a reference to the building code in volume 0 did not accomplish the same purpose.

If the requirement is such that not all of [a] is governed by the same requirement, but [a] can be divided into sections of the same type for which [b] is always the same, the requirement is still stated at the assembly level. For example, if one building in the project must have a completely non-combustible shell, but another need not have, such a requirement is stated at the assembly level. However, if as is more likely, the parts of [a] that are different are actually the systems within the assembly, the requirement should be stated at the system level. For example, the superstructure may need to be non-combustible but the exterior enclosure may not need to be. In that case, the requirement for each system would be stated at the system level under the system title. The initial

chapter in each volume is titled the same as the volume and is organized into performance; products (acceptable and unacceptable); and methods of construction (acceptable and unacceptable).

For each sub-system (Level 3) heading there is a location in which subsystem and component level requirements are stated. The same principles  
5 apply as described for assembly and system level requirements. Thus each subsystem chapter is titled with the subsystem name and is organized in a similar manner: performance; products, and methods of construction. The system organizes segments of text by viewing levels and allow the user to view a level of detail.

10 In the system one or more statements of requirements is necessary for each element of the building and site. The requirements include the owner's definition of the building and the substantiation is whatever the owner wishes to receive showing that the proposal meets the requirements. An appropriate statement of acceptable substantiation is necessary for each requirement.  
15 Depending on the element, the requirements may be stated in performance terms or prescriptive terms or a combination of both. The substantiation can range from nothing at all to very detailed documentation, and submission of it may be specific to occur at the proposal stage, the design stage, or the construction stage. In addition, the user of the system is able to omit all substantiation statements and  
20 still be able to produce a contract document that can be enforced at the construction stage.

For many intangible requirements, it is not only difficult to determine what is an adequate performance requirement but identifying a practical method of substantiation may be almost impossible. In such a case, prescriptive  
25 requirements are stated giving a range of options from which the design-builder can choose or listing options that are not acceptable. Some examples of such substantiation include but are not limited to: (1) a statement by the design-builder that the design will comply with the requirements (which is usually incorporated into the terms of the proposal); (2) a statement that acceptance by the owner of  
30 alternative proposed products is indicated by incorporating the proposal into the

contract documents; (3) a submittal of manufacturer's product literature or samples; (4) a submittal of certifications based on factory testing; and (5) a submittal of a manufacturer warranty.

FIG. 4 illustrates various overlays in accordance with one embodiment of the invention. Database 128 stores information in a hierarchical relational manner. Once a user has utilized system 100 to produce a new design document, that is, has selected the product elements and performance values to his or her desired level of granularity, reference information for the new document is stored in an electronic project file ("overlay"). By storing reference information for the new design document, rather than the actual design or product data, the size of the electronic file is reduced. This means that the amount of bandwidth required to transfer the new document is reduced. In this embodiment of the invention, the reference information for each overlay includes a series of codes and pointers that RDM module 108 can use to extract actual data for the design document from database 128. In other words, an overlay operates as a template for an underlying database.

Thus, each overlay can be sent in electronic form between entities involved in the design process, such as the owner entity, design-build entity and materials supplier entity. As long as each entity utilizes design system 100, each entity can access the appropriate data set from database 128 using the overlay. This minimizes the amount of data necessary for transmission between entity devices, while maintaining the capability of multiple entities to contribute to the design process by modifying the overlay appropriately.

FIG. 5 is a block diagram of a design system in accordance with one embodiment of the invention. FIG. 5 illustrates a design system 500 comprising a first design-build system 502, a second design-build system 506, and a network 504 connecting systems 502 and 506. Design-build systems 502 and 506 are similar to design-build system 100. Network 504 can be any network suitable for transferring data, such as a packet-switched network operating in accordance with a transport control protocol/internet protocol (TCP/IP).

Systems 502 and 506 pass a project overlay between them, with a first

overlay 508 representing the owner's performance requirements for a building (e.g., RFP), a second overlay 510 representing the design-build entity's detailed specification designed using first overlay 508, and a third overlay 512 representing instructions to the materials supplier. The operation of design system 500 will be further described with reference to FIG. 6.

5           FIG. 6 is a block flow diagram of the steps performed by a design system in accordance with one embodiment of the invention. As shown in FIG. 6, an owner entity constructs first overlay 508 for a performance database using system 502 at step 600. First overlay 508 is sent to system 506 via network 504 at step 602. System 502 receives second overlay 510, which in this embodiment of the  
10          invention has been constructed by the design-build entity using system 506. System 502 retrieves the underlying data in accordance with the first and second overlays at step 606, and displays (e.g., using monitor 126) each data set for review by the owner entity at step 608.

          At step 600, system 502 constructs first overlay 600 by first receiving a  
15          selection for at least one first product element. The first product element could be a substructure, foundation, basement, and so forth. A performance value is received for the first product element. The performance value may be a qualitative or quantitative parameter as described previously. For example, the performance value may be that the foundation must be able to support the  
20          building without settling for 50 years. A representation for the first product element, or alternatively the product element data itself, and the associated performance values are then stored in electronic form.

          Second overlay 510 is constructed as follows. System 506 receives first overlay 508 from network 504. System 506 uses first overlay 508 to extract data  
25          from database 128, including any product elements and their associated performance values. Using the product elements, a design-build entity can use system 506 to build upon the work accomplished by the owner entity which is represented by the first overlay, by retrieving one or more second product elements that comprise a portion of the first product element (e.g., are linked to  
30          the first product element) and which are consistent with the associated

performance values. For example, if the first product element was a foundation capable of supporting a certain weight, a design-build entity could use system 506 to select from among different types of foundations, such as standard foundations, other foundations, or slabs on grade, that are capable of sustaining the requisite weight. In addition, the global switch may be used to convert the text fragments  
5 associated with the first product elements to convert the text to language appropriate for the design-build specification. A second representative for the selected second product elements, or the second product elements data, is then stored in electronic form along with the first overlay and performance values.

In addition to displaying the data sets for the first and second overlay, this  
10 embodiment of the invention also compares the data sets to ensure each of the first product elements and performance values include a corresponding second product element. That is, if a certain performance requirement has not been given any treatment by the design-build entity, e.g., no second product elements were selected to more specifically define the first product elements, then system  
15 502 will indicate the lack of treatment for the owner-entity to factor into his or her evaluation of the second overlay data set.

Once the owner-entity accepts the design-build specification represented by the second overlay, which may take several iterations of transferring the first and second overlays between systems 502 and 506, a third overlay is constructed  
20 for the materials supplier entity. The global switch is used to convert the language from language appropriate for the design-build entity to language appropriate to the materials supplier entity. The converted information is stored in electronic form, and sent to the materials supplier entity or materials supplier entity system. In the latter case, the materials supplier entity system could  
25 retrieve a third set of data from database 128 corresponding to the third overlay, and display the third set of data for use by the materials supplier entity.

FIG. 7 is a block diagram of a design system having multiple design-build entities in accordance with one embodiment of the invention. As shown in FIG. 7, a first design-build system 702 is in communication with a second design-build  
30 system 706, a third design-build system 708 and a fourth design-build system

710, via network 704. The owner entity using system 702 constructs a first overlay 714 and sends it to systems 706, 708 and 710. Systems 706, 708 and 710 each send back second overlays 712, 716 and 720, respectively. Data sets corresponding to second overlays 712, 716 and 720 are retrieved by system 702, compared to ensure at least one second product element corresponds with each first product element of first overlay 718, and displayed. Each data set for the first overlay is compared to the second overlay to determine whether any of the second overlays did not include the selection of a second product element to further define a first product element represented in the first overlay. Further, the first data set and second data sets are arranged such that each performance requirement set forth in the RFP is aligned with its corresponding response in each design-build specification, thereby allowing the owner entity to conveniently compare the multiple responses.

Although various embodiments are specifically illustrated and described herein, it will be appreciated that modifications and variations of the present invention are covered by the above teachings and within the purview of the appended claims without departing from the spirit and intended scope of the invention. For example, although information is passed between design-build systems using a network 104, it can be appreciated that information could also be passed between systems in more conventional methods using optical or magnetic storage media, and still fall within the scope of the invention. Further, although the design elements used in describing various embodiments of the invention were in terms of performance requirements used in the design and construction of a building, it can be appreciated that the product elements can describe any product for any industry and still remain within the scope of the invention.

25

What is claimed is:

- 1 1. A method for designing a product, comprising:  
2 constructing a first overlay for a performance database at a first device;  
3 sending said first overlay to a second device;  
4 receiving a second overlay for said database from said second device;  
5 retrieving a first set of data from said database corresponding to said first  
6 overlay, and a second set of data from said database corresponding to said second  
7 overlay; and  
8 displaying said first and second sets of data.
- 1 2. The method of claim 1, wherein said constructing comprises:  
2 receiving a selection for at least a first product element from a first set of  
3 product elements;  
4 receiving at least one performance value for said first product element;  
5 and  
6 storing a first representative for said first product element and said  
7 performance value in electronic form.
- 1 3. The method of claim 2, wherein said receiving said second overlay  
2 comprises:  
3 receiving said first overlay at said second device;  
4 constructing said second overlay using said first overlay; and  
5 sending said second overlay to said first device.
- 1 4. The method of claim 3, wherein constructing said second overlay  
2 comprises:  
3 retrieving said first product element and said performance value from said  
4 first overlay;  
5 retrieving at least one second product element from a second set of  
6 product elements, said second product element comprising a portion of said first  
7 product element and consistent with said performance value; and

8 storing said first representative and performance value with a second  
9 representative for said second product element in electronic form.

1 5. The method of claim 4, further comprising:  
2 comparing said first and second sets of data to ensure each of said first  
3 product elements includes a corresponding second product element; and  
4 indicating each of said first product elements not having a corresponding  
5 second product element.

1 6. The method of claim 1, further comprising:  
2 constructing a third overlay;  
3 sending said third overlay to a third device;  
4 retrieving a third set of data from said database corresponding to said third  
5 overlay; and  
6 displaying said third set of data.

1 7. The method of claim 6, further comprising:  
2 receiving a fourth overlay at said first device;  
3 retrieving a fourth set of data from said database corresponding to said  
4 fourth overlay;  
5 comparing said first and fourth sets of data to ensure each of said first  
6 product elements includes a corresponding second product element;  
7 indicating each of said first product elements not having a corresponding  
8 second product element; and  
9 displaying said first, second and fourth sets of data.

1 8. A method for producing a design document for a product, the product  
2 having product elements arranged in a hierarchical manner, comprising:  
3 receiving a selection for at least one product element;  
4 receiving at least one performance value associated with said selected  
5 product element;



1        retrieving a text segment associated with each selected product element;  
2        receiving a selection for at least one of said retrieved text segments; and  
3        constructing the document from said selected text segments.

1    9.     A computer-readable medium whose contents cause a computer system to  
2    assist in designing a building, the computer system having a design program and  
3    a relational database management program that when executed performs:  
4        constructing a first overlay for a performance database at a first device;  
5        sending said first overlay to a second device;  
6        receiving a second overlay for said database from said second device;  
7        retrieving a first set of data from said database corresponding to said first  
8    overlay, and a second set of data from said database corresponding to said second  
9    overlay; and  
10       displaying said first and second sets of data.

1    10.    The computer-readable medium of claim 9, wherein said constructing  
2    performs:  
3        receiving a selection for at least a first product element from a first set of  
4    product elements;  
5        receiving at least one performance value for said first product element;  
6    and  
7        storing a first representative for said first product element and said  
8    performance value in electronic form.

1    11.    The computer-readable medium of claim 10, wherein said receiving said  
2    second overlay performs:  
3        receiving said first overlay at said second device;  
4        constructing said second overlay using said first overlay; and  
5        sending said second overlay to said first device.

1 12. The computer-readable medium of claim 11, wherein said constructing  
2 said second overlay performs:  
3 retrieving said first product element and said performance value from said  
4 first overlay;  
5 retrieving at least one second product element from a second set of  
6 product elements, said second product element comprising a portion of said first  
7 product element and consistent with said performance value; and  
8 storing said first representative and performance value with a second  
9 representative for said second product element in electronic form.

1 13. The computer-readable medium of claim 12, further performing the steps  
2 of:  
3 comparing said first and second sets of data to ensure each of said first  
4 product elements includes a corresponding second product element; and  
5 indicating each of said first product elements not having a corresponding  
6 second product element.

1 14. The computer-readable medium of claim 9, further performing the steps  
2 of:  
3 constructing a third overlay;  
4 sending said third overlay to a third device;  
5 retrieving a third set of data from said database corresponding to said third  
6 overlay; and  
7 displaying said third set of data.


1 15. The computer-readable medium of claim 14, further performs:  
2 receiving a fourth overlay at said first device;  
3 retrieving a fourth set of data from said database corresponding to said  
4 fourth overlay;  
5 comparing said first and fourth sets of data to ensure each of said first  
6 product elements includes a corresponding second product element;

1           indicating each of said first product elements not having a corresponding  
2 second product element; and  
3           displaying said first, second and fourth sets of data.

1 16.    A computer-readable medium whose contents cause a computer system to  
2 assist in producing a design document for a product, the product having product  
3 elements arranged in a hierarchical manner, and the computer system having a  
4 design program and a relational database management program that when  
5 executed performs:

6           receiving a selection for at least one product element;  
7           receiving at least one performance value associated with said selected  
8 product element;  
9           retrieving a text segment associated with each selected product element;  
10          receiving a selection for at least one of said retrieved text segments; and  
11          constructing the document from said selected text segments.

1 17.    An apparatus for producing a design document, comprising:  
2          a relational database having product elements arranged in a hierarchical  
3 manner, with said product elements having associated performance values and  
4 text segments;  
5          a relational database management system in communication with said  
6 relational database;  
7          a design module in communication with said relational database and said  
8 relational database management system, said design module producing the design  
9 document using preselected performance values and text segments.

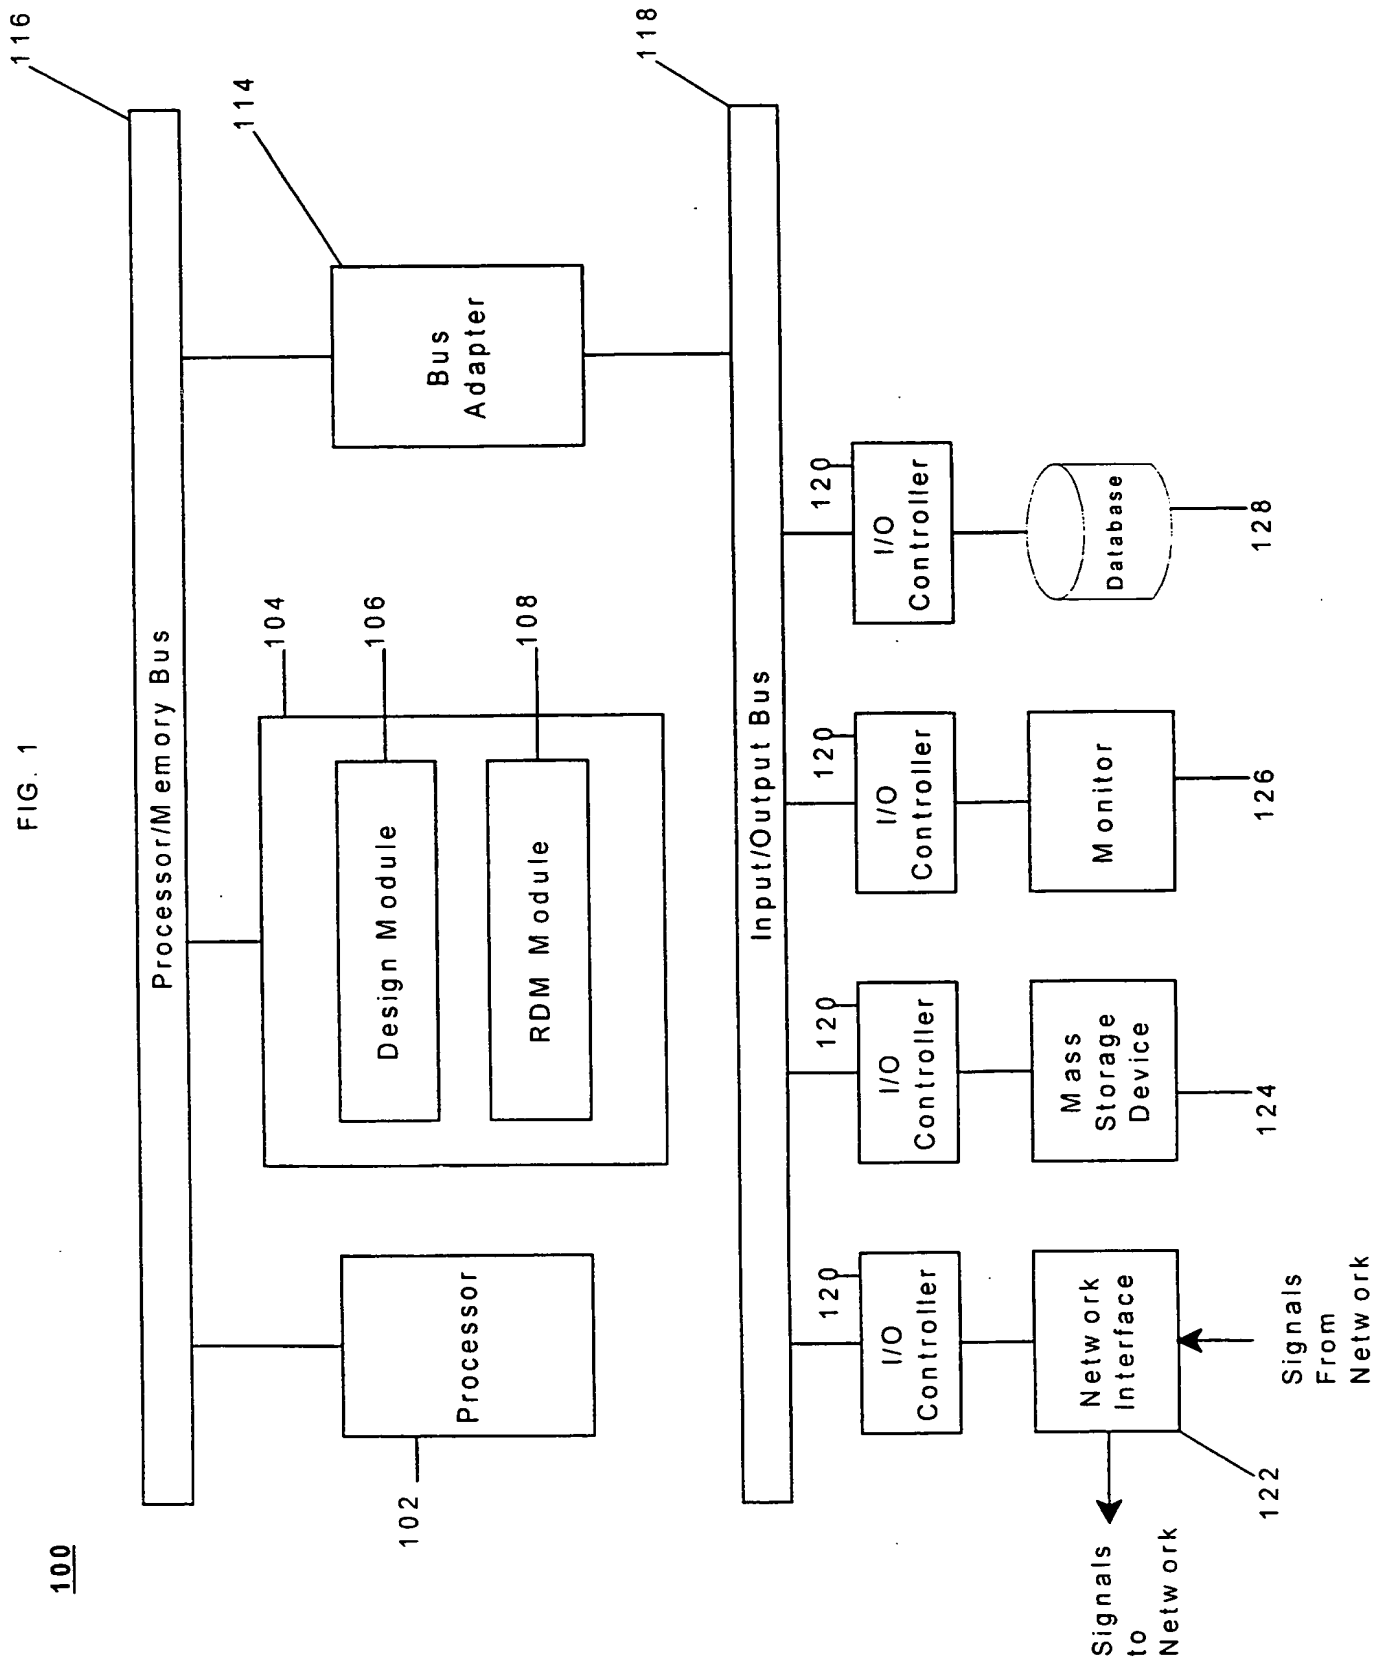

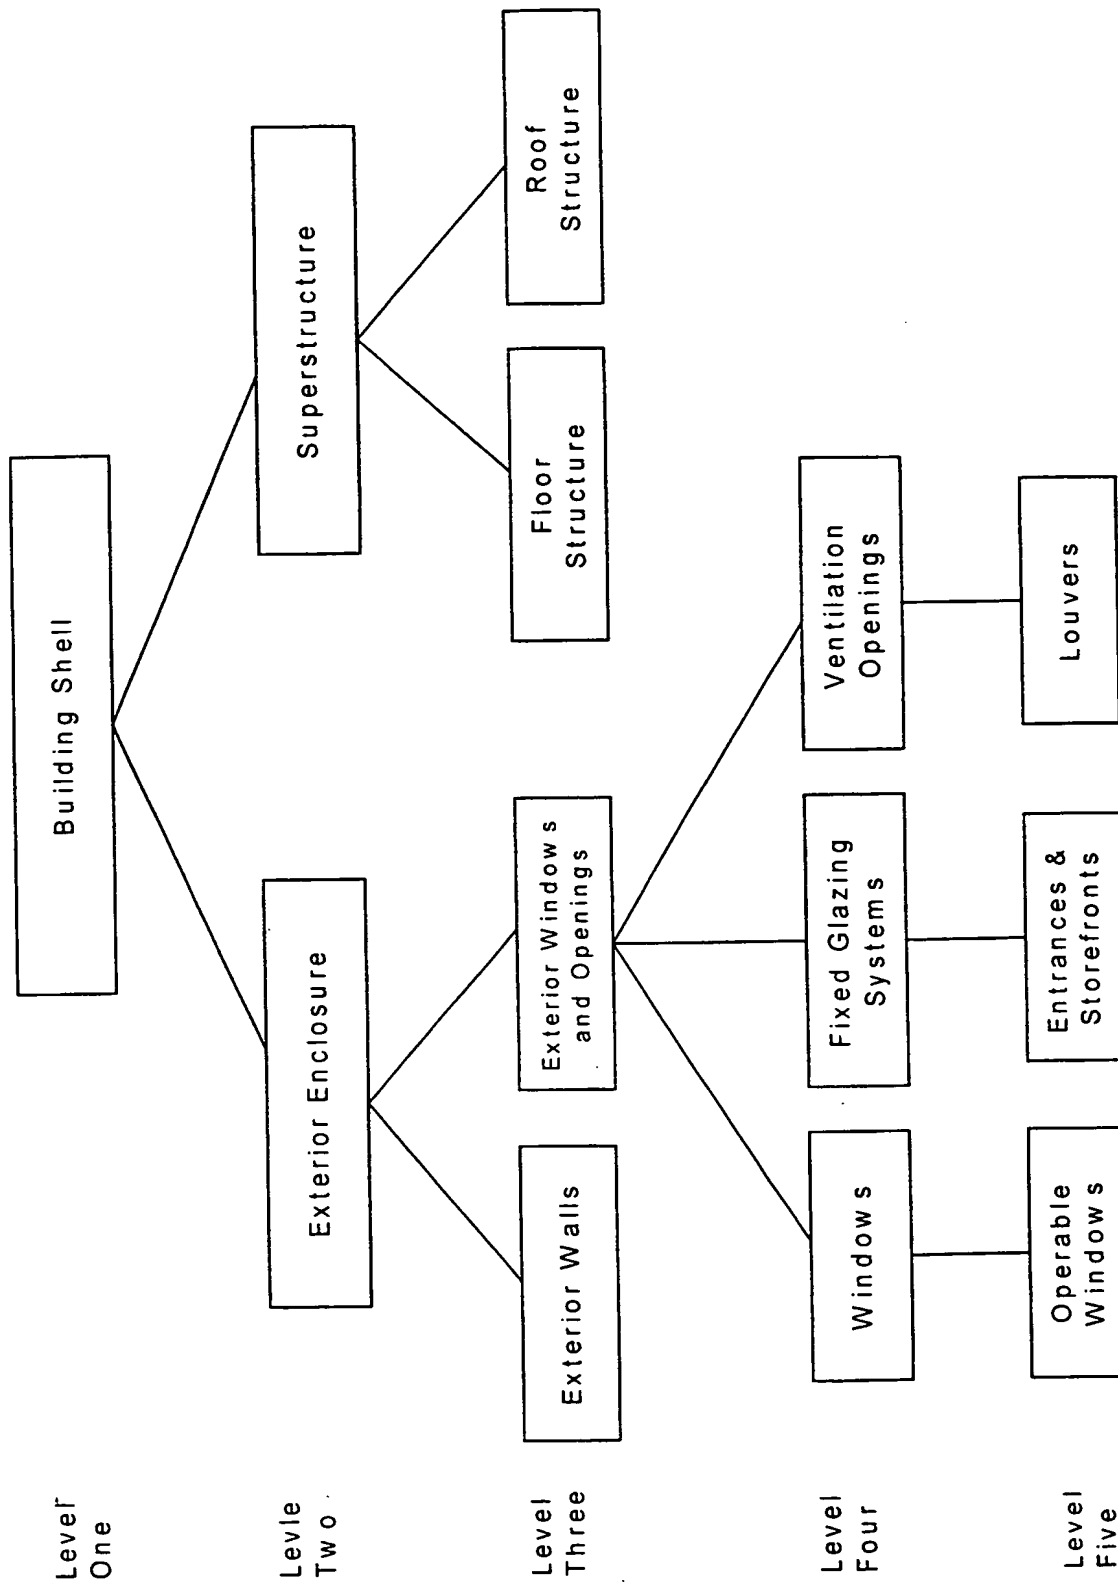


FIG. 2

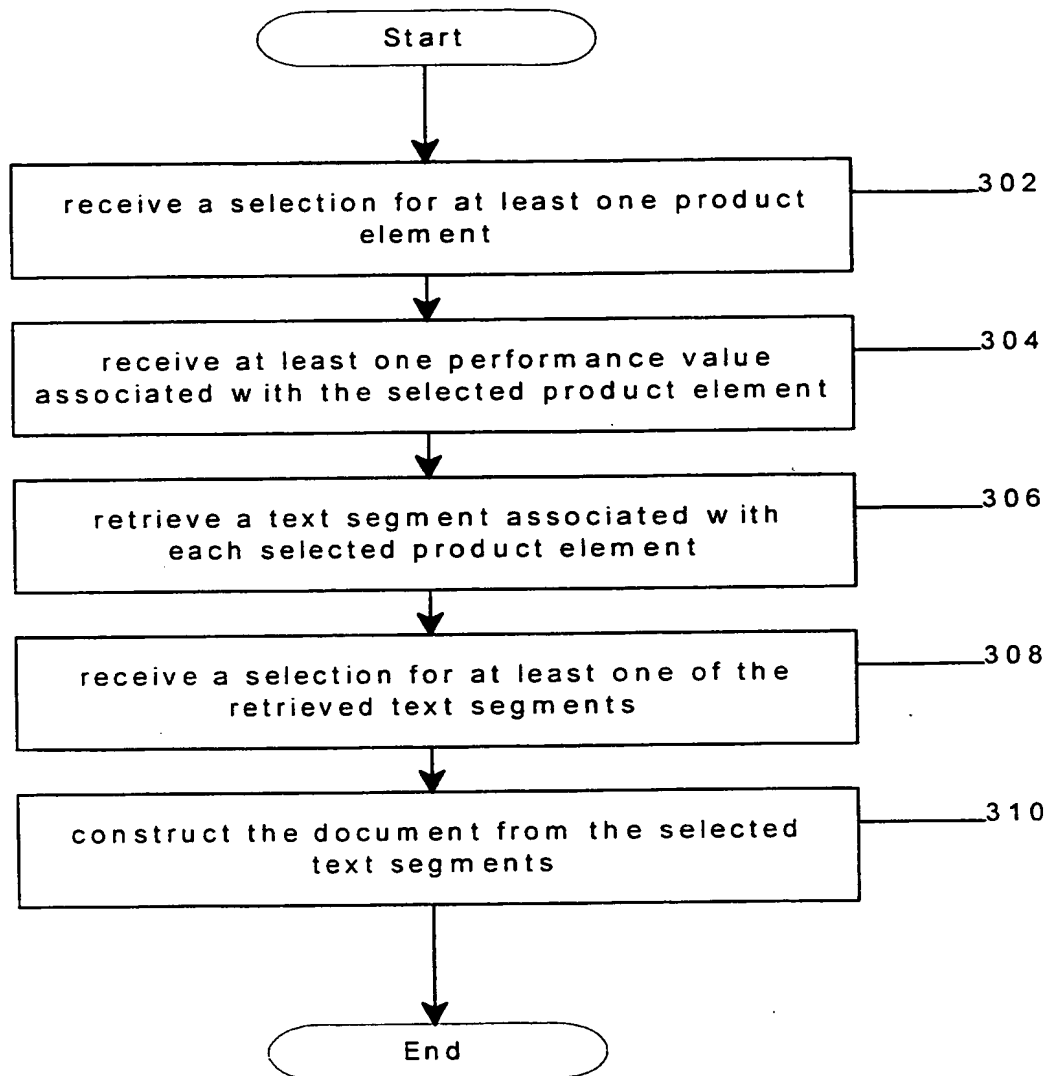


FIG. 3

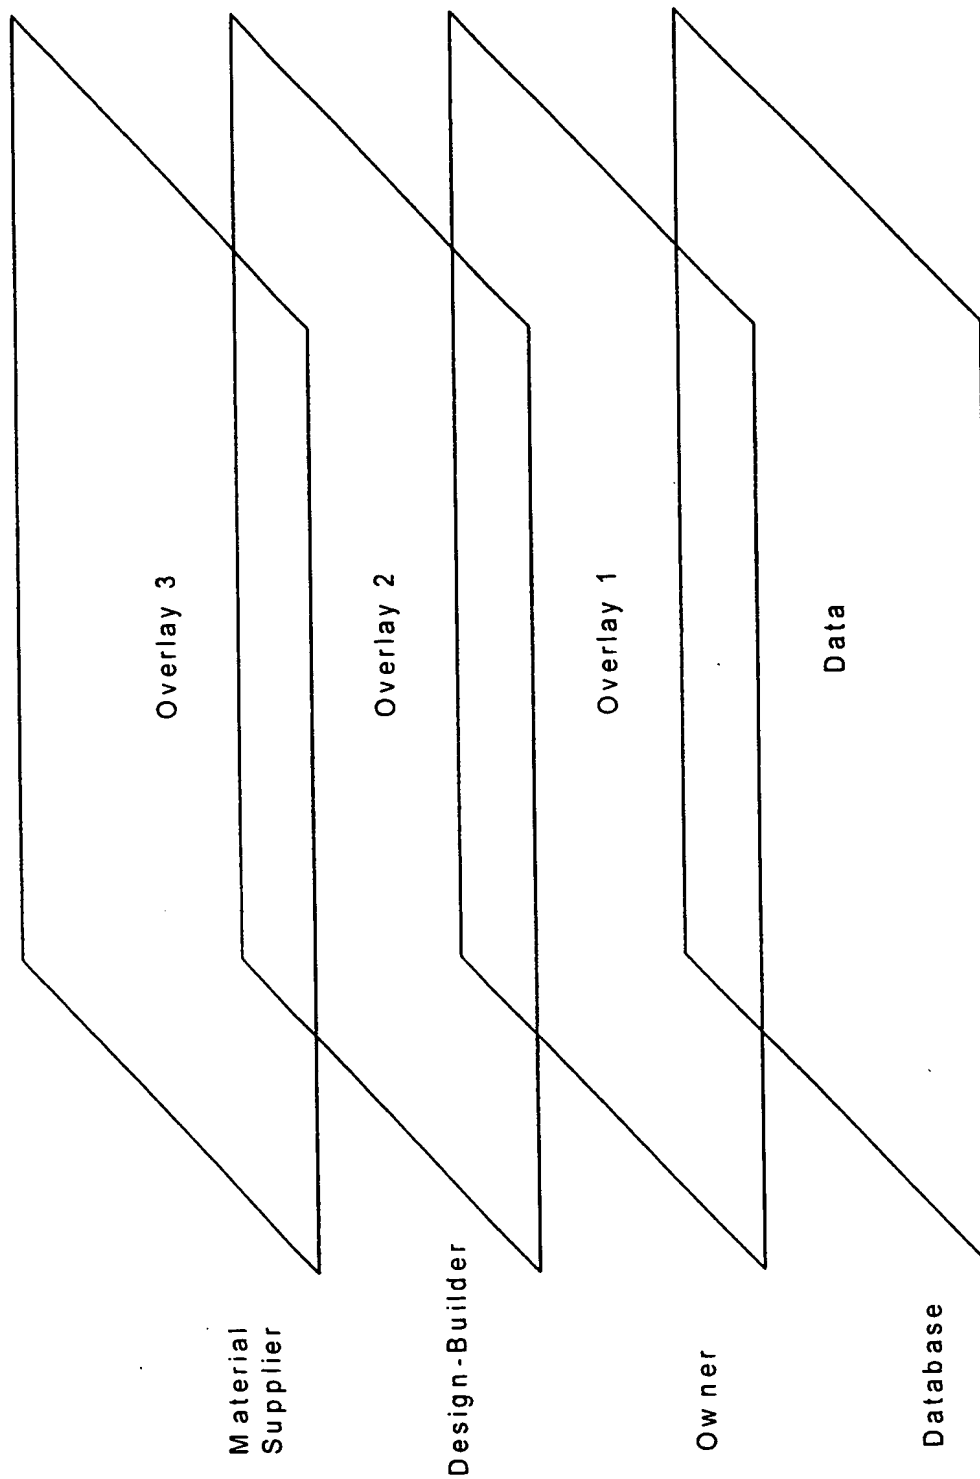
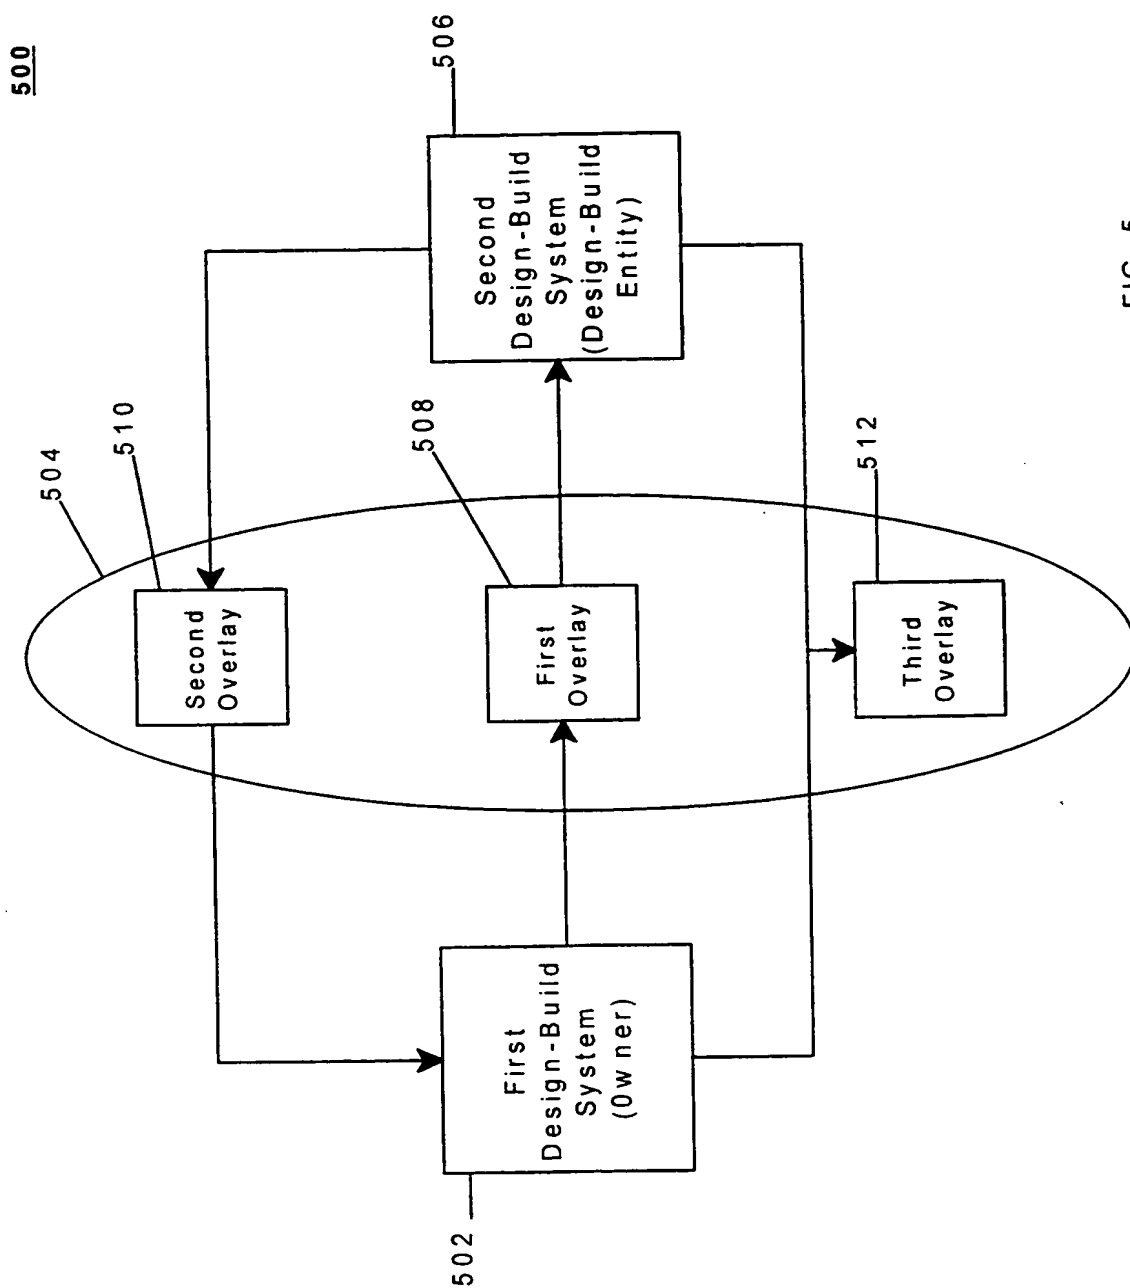


FIG. 4





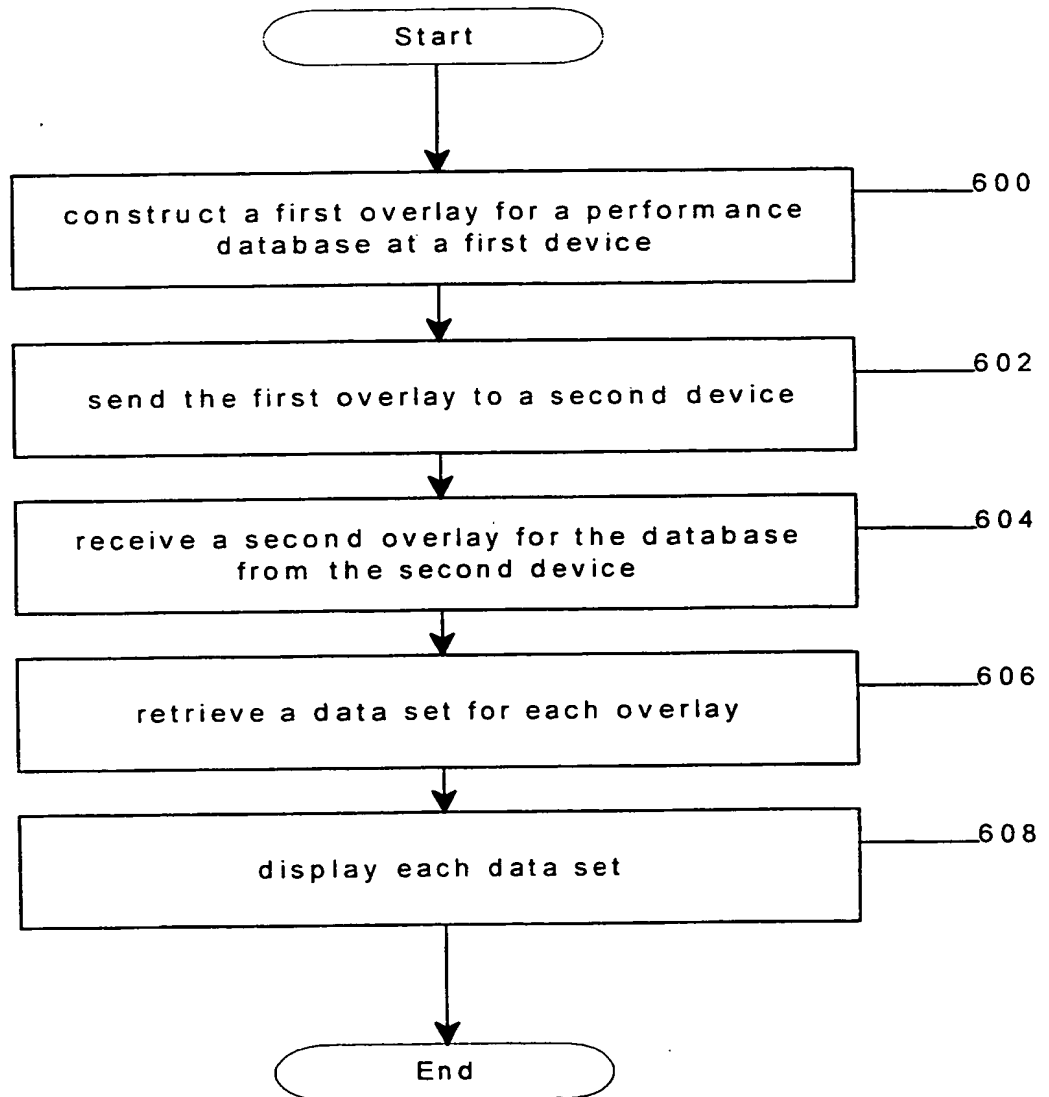


FIG. 6

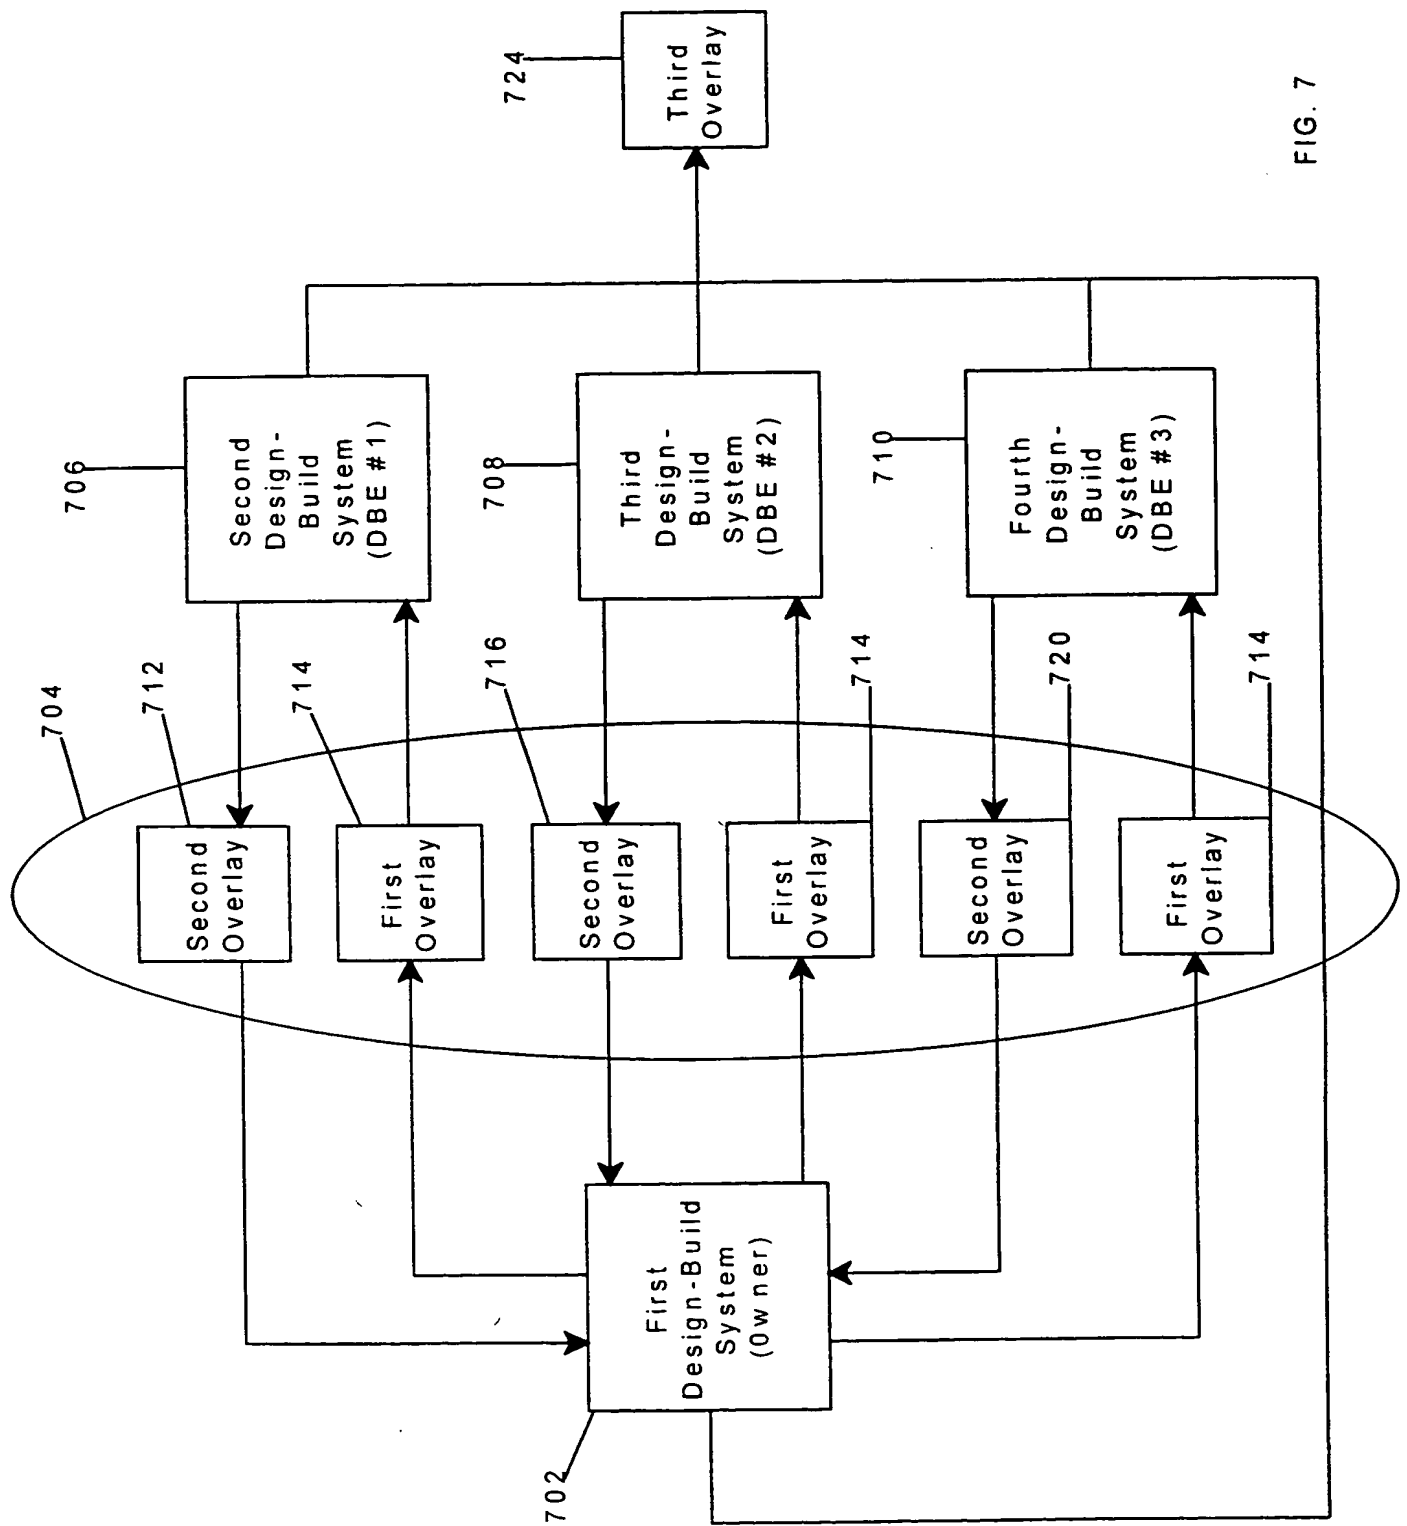


FIG. 7

## INTERNATIONAL SEARCH REPORT

 International application No.  
PCT/US98/12986

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : Please See Extra Sheet.

US CL : 364/468.03, 468.04, 468.06, 468.07, 468.08, 468.09

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 364/468.03, 468.04, 468.06, 468.07, 468.08, 468.09; 707/100

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — Y	US 5,109,337 A (FERRITER ET AL) 28 APRIL 1992, SEE ENTIRE DOCUMENT, ESPECIALLY ABSTRACT.	1-7, 17 ----- 9-16
X	US 4,875,162 A (FERRITER ET AL) 17 OCTOBER 1989, SEE ENTIRE DOCUMENT, ESPECIALLY ABSTRACT	8
Y, P	US 5,740,425 A (POVILUS) 14 APRIL 1998, SEE ENTIRE DOCUMENT, ESPECIALLY ABSTRACT.	9-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*E"	earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*O"	document referring to an oral disclosure, use, exhibition or other means	*G* document member of the same patent family
*P"	document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

28 SEPTEMBER 1998

Date of mailing of the international search report

30 OCT 1998

 Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CAROLYN T. BAUMGARDNER

Telephone No. (703) 306-4768

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/12986

## A. CLASSIFICATION OF SUBJECT MATTER: IPC (6):

G06F 19/00  
G06G 7/66

## B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS

search terms: database, overlay, template, performance, display, computer readable medium, computer system, management program, design document/specification, text segment, relational database




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : G06F 19/00, G06G 7/66		A1	(11) International Publication Number: <b>WO 98/59310</b> (43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: PCT/US98/12986 (22) International Filing Date: 23 June 1998 (23.06.98) (30) Priority Data: 60/050,538 23 June 1997 (23.06.97) US (71) Applicant: THE CONSTRUCTION SPECIFICATIONS INSTITUTE [US/US]; 601 Madison Street, Alexandria, VA 22314-1791 (US). (72) Inventor: HARTMAN, Linda, Marie; 3311 Lancer Drive, Hyattsville, MD 20782 (US). (74) Agents: PIETRANTONIO, Frank et al.; Kenyon & Kenyon, 1025 Connecticut Avenue, N.W., Washington, DC 20036 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD AND APPARATUS FOR COMPUTER AIDED BUILDING SPECIFICATION GENERATION

## (57) Abstract

A method and apparatus for producing a design document for a product, with the product having product elements arranged in a hierarchical manner and stored in a relational database (128). A selection is received for at least one product element. At least one performance value associated with the selected product element is received. A text segment associated with each selected product element is retrieved from the database (128). Selected text segments are then used to construct the design document.

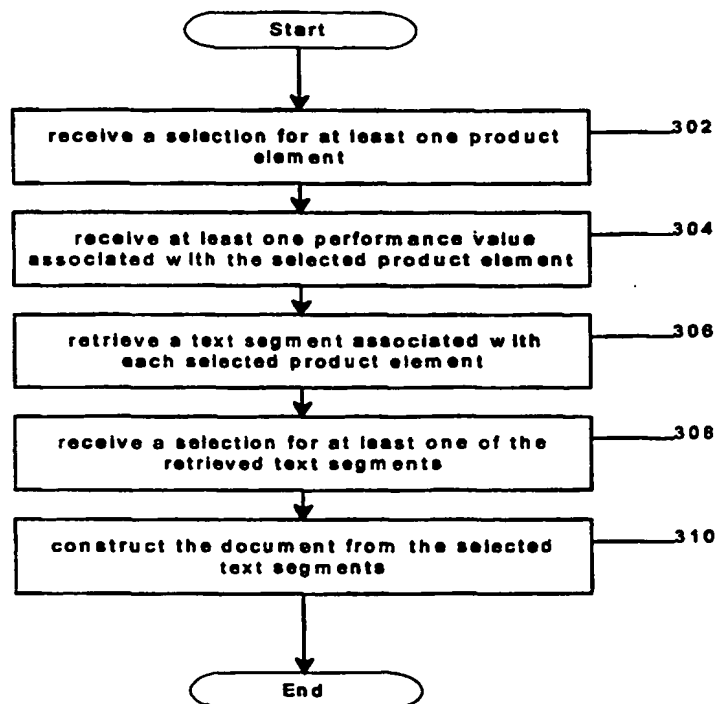

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**CORRECTED  
VERSION\***

**CORRECTED  
VERSION\*\***



**PCT**

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>G06F 19/00, G06G 7/66</b>		<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/59310</b>
			<b>(43) International Publication Date:</b> 30 December 1998 (30.12.98)
<b>(21) International Application Number:</b> PCT/US98/12986			<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
<b>(22) International Filing Date:</b> 23 June 1998 (23.06.98)			
<b>(30) Priority Data:</b> 60/050,538                      23 June 1997 (23.06.97)                      US			
<b>(71) Applicant:</b> THE CONSTRUCTION SPECIFICATIONS INSTITUTE [US/US]; 601 Madison Street, Alexandria, VA 22314-1791 (US).			
<b>(72) Inventor:</b> HARTMAN, Linda, Marie; 3311 Lancer Drive, Hyattsville, MD 20782 (US).			
<b>(74) Agents:</b> PIETRANTONIO, Frank et al.; Kenyon & Kenyon, 1025 Connecticut Avenue, N.W., Washington, DC 20036 (US).			<b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** METHOD AND APPARATUS FOR COMPUTER AIDED BUILDING SPECIFICATION GENERATION

**(57) Abstract**

A method and apparatus for producing a design document for a product, with the product having product elements arranged in a hierarchical manner and stored in a relational database (128). A selection is received for at least one product element. At least one performance value associated with the selected product element is received. A text segment associated with each selected product element is retrieved from the database (128). Selected text segments are then used to construct the design document.

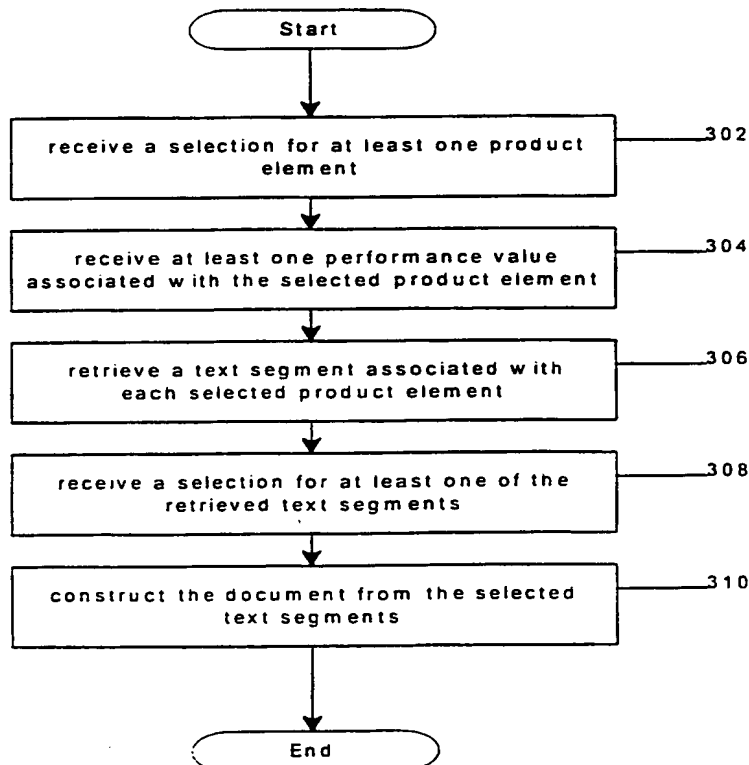

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



5       **METHOD AND APPARATUS FOR COMPUTER AIDED BUILDING  
SPECIFICATION GENERATION**

**CROSS-REFERENCES TO RELATED APPLICATIONS**

          This application claims the benefit of United States Provisional  
Application Number 60/050,538 titled "Method and Apparatus For Computer  
10 Aided Building Specification Generation" and filed on June 23, 1997.

**FIELD OF INVENTION**

          The invention relates generally to design systems. More specifically, the  
invention relates to design systems for the creation of product design documents.  
15

**BACKGROUND OF THE INVENTION**

          A planning process which involves multiple entities can be difficult to  
manage and coordinate, especially if there are one or more documents being  
passed between parties during the course of the process. This is the case with the  
20 construction and building industry. The planning which is required prior to the  
construction of a modern building is a labor intensive exercise, segments of which  
may be repeated several times during the process. When a prospective owner  
desires to build a building, using a design-builder delivery system, the owner's  
agents produce a request for proposal. The request for proposal (RFP) document  
25 which is distributed to potential design-builders includes the performance  
requirements for the building and the requirements for submitting a proposal.

          A design-builder entity then distributes the RFP to a design team of  
architects and engineers and a builder team. The design team is typically

responsible for designing the building in sufficient detail to begin actual construction of the building. These design details are embodied in construction drawings and specifications. The details for the building include specific features, materials, products, systems, schematic diagrams, and so forth. Using this design specification, the builder team may produce a financial document  
5 estimating the cost of the project and a construction schedule. At this point, if financial projections exceed the allocated budget, another iteration of the design may occur in an attempt to produce a design-builder proposal which is financially commensurate with the RFP. When the financial document and the design specification are satisfactory to the design-builder entity, the documents are  
10 combined into a design-builder entity proposal which is submitted to the prospective owner.

At this point the agents of the owner compare the design-builder proposal with the RFP and based upon the findings of the design teams, a decision is made as how to proceed. The decision at this point may be not to proceed, to issue  
15 another RFP, to negotiate specific changes in the proposal or to accept the design-builder proposal. Thus at several stages in the planning, many segments of the planning may be redone multiple times in an attempt to meet certain constraints.

In an attempt to reduce the amount of work required for this labor intensive process several systems have been developed which attempt to automate  
20 segments of the planning process. For example, Computer Aided Design (CAD) programs reduce the time required to create or change the schematic designs, while specification and estimator programs reduce the time necessary to create or change the textual portions of the proposal based upon the materials specified by the designers.

25 In view of the foregoing, it can be appreciated that a substantial need exists for a method and apparatus which solves the above-discussed problems, more specifically, to more efficiently allow multiple entities to work together while passing one or more documents between the entities.

## 30 SUMMARY OF THE INVENTION

One embodiment of the invention includes a method and apparatus for producing a design document for a product, with the product having product elements. Data representing the product elements can be arranged in a hierarchical manner and stored in a relational database. In producing the design document, a selection is received for at least one product element. At least one  
5 performance value associated with the selected product element is received. A text segment associated with each selected product element is retrieved from the database. Selected text segments are then used to construct the design document.

In another embodiment of the invention, a first entity (e.g., an owner entity) constructs a first overlay for the design document using a first design-build  
10 device. An overlay is a template for the relational database. The first overlay is sent to a second design-build device. A second overlay for the design document is received from the second device. The second overlay includes the first overlay and any modifications made to the design document by a second entity (e.g., a design-build entity). A first and second set of data from the database  
15 corresponding to the first and second overlays, respectively, are retrieved and displayed for review by the first entity. The first or second entity can then create a third overlay including the first and second overlays and any further modifications for the design document, and send the third overlay to a third design-build device for review by a third entity (e.g., a materials supplier).

20 With these and other advantages and features of the invention that will become hereinafter apparent, the nature of the invention may be more clearly understood by reference to the following detailed description of the invention, the appended claims and to the several drawings attached herein.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a design-build system in accordance with one embodiment of the invention.

FIG. 2 illustrates a hierarchical model suitable for use with one embodiment of the invention.

30 FIG. 3 is a block flow diagram of the steps performed by a design-build

system in accordance with one embodiment of the invention.

FIG. 4 illustrates various overlays in accordance with one embodiment of the invention.

FIG. 5 is a block diagram of a design system in accordance with one embodiment of the invention.

5        FIG. 6 is a block flow diagram of the steps performed by a design system in accordance with one embodiment of the invention.

FIG. 7 is a block diagram of a design system having multiple design-build entities in accordance with one embodiment of the invention.

## 10    DETAILED DESCRIPTION

One embodiment of the invention comprises a method and apparatus for producing design documents in accordance with a particular industry, such as the construction industry, aerospace industry, automotive industry, computer and telecommunications industry, and so forth. For illustrative purposes only, this  
15    embodiment of the invention will be described in terms of the construction industry. The term "construction industry" refers to the industries whose chief businesses are the design, demolition, construction, reconstruction, life-cycle management, or renovation of buildings; the infrastructure serving buildings; and transportation and utility infrastructures. The structures produced or designed in  
20    the construction industry may be land-based, marine based, or space-based.

Building types referenced under the definition of "buildings" include: General Buildings (e.g., buildings constructed to house commercial, educational, and medical activities, offices, stores, hotels, and housing of all types); Manufacturing Facilities (e.g., buildings constructed to house manufacturing or  
25    assembly of automobiles, textiles, electronics, etc.); Transportation Facilities (e.g., buildings required for the functioning of transportation systems, such as airports and train stations); Industrial Processing Facilities (e.g., buildings constructed to house pulp and paper, steel and other metal production operations, metal refineries, chemical, pharmaceutical, and food and other processing plants,  
30    etc.); Non-vehicular Space Facilities (e.g., facilities constructed primarily to

house persons living and working in space, to enable the exploitation of extraterrestrial resources, and to house extraterrestrial manufacturing operations, etc.). Infrastructure types referenced under the definition of infrastructure serving buildings include electrical power and communication lines, water and waste lines, gas and other utility lines. Transportation and Utility Infrastructures include: Ground and Underground Transportation Infrastructure (e.g., roads, bridges, railroads, tunnels, over- and under-passes, etc.); Power Production and Transmission Infrastructure (e.g., thermal and hydroelectric power plants, waste-to-energy and co-generation plants, and auxiliary substations, transformers, transmission lines, etc.); Water Supply Infrastructure (e.g., dams, reservoirs, pumping stations, distribution pipelines, irrigation canals, desalination and potability treatment plants, etc.); Sewerage/Solid Waste Management Infrastructure (e.g., sanitary and storm sewers, treatment plants, pumping stations, incinerators, industrial waste facilities, etc.); Hazardous Waste Treatment/Abatement Facilities (e.g., facilities for the storage, containment, and/or detoxification of asbestos- and lead-contaminated waste, chemical and nuclear contaminants, etc.); Waterways and Marine Infrastructure (e.g., canals, locks, marine dredging facilities, piers, sea-based oil rigs, ship-building facilities, etc.); and Mining and Refineries (e.g., underground and strip-mining facilities, petrochemical plants, petroleum refineries, offshore mining or drilling facilities and auxiliary pipelines. Although this embodiment of the invention is described with reference to the construction industry, however, it can be appreciated that the principles and concepts outlined in terms of the construction industry may be equally applied to other industries and still fall within the scope of the invention.

It is worthy to note that any reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

One embodiment of the invention comprises a system that enables a first

entity (e.g., prospective owner) to produce an RFP that describes building facility requirements in performance terms for design-build or other construction projects ("design-build system"). The design-build system then permits a second entity (e.g., design-builder) to generate a design-builder proposal based upon the RFP. In other words, the proposal is generated using the performance-based description  
5 or specification of the proposed building and its requisite site work. In addition, the system permits the design-builder entity, the prospective owner, or other contractor to generate performance specifications for use by a construction team.

Referring now in detail to the drawings wherein like parts are designated by like reference numerals throughout, there is illustrated in FIG. 1 a design-build  
10 system in accordance with one embodiment of the invention. As shown in FIG. 1, a design-build system 100 comprises a processor 102, a memory 104, and a bus adapter 114, each of which is connected to a processor/memory bus 116 and an Input/Output (I/O) bus 118 via bus adapter 114. Further, design build system 100 contains a network interface 122, mass storage device 124, monitor 126, and  
15 database 128, each of which is connected to I/O bus 118 via an I/O controller 120.

In this embodiment of the invention, design-build system 100 is a microprocessor-based personal computer (PC) system. Memory 104 may be any suitable computer readable memory device such as one or more dynamic random  
20 access memory (DRAM) devices. Mass storage device 124 may be any suitable computer-readable storage means for storing digital signals such as magnetic storage media (i.e., a magnetic disk), optical storage media (i.e., a CD-ROM or Digital Video Disc), and so forth. Further, design-build system 100 may contain various combinations of machine readable storage devices through other I/O  
25 controllers, which are accessible by processor 102 and which are capable of storing digital signals. Network interface 122 may be any suitable means for controlling communication signals between network devices using a desired set of protocols, services and operating procedures. Those skilled in the art will understand that the communication signals may be received over any suitable  
30 medium such as twisted-pair wire, co-axial cable, fiber optics, radio-frequencies,

and so forth. Processor 102 may be any suitable means for performing the functionality for various embodiments of the invention, and is preferably a general purpose microprocessor such as the Pentium®, Pentium Pro, or Pentium II made by Intel Corporation. Monitor 126 may be any means for displaying analog signals, such as a variable graphics array (VGA) monitor. I/O controllers  
5 120 may be any means for controlling the flow of information between I/O bus 118 and various I/O devices such as network interface 122, mass storage device 124, monitor 126 and database 128. Bus adapter 114 may be any means suitable for transferring data back and forth between processor/memory bus 116 and I/O bus 118. Design system 100 is non-operating system dependent and in one  
10 embodiment functions with Windows 3.1, 3.11, Windows 95, or Windows NT.

Memory 104 stores computer program segments that a processor (e.g., processor 102) executes to perform the functionality for this embodiment of the invention. These computer program segments are separated into two modules, that is, a design module 106 and a relational database management (RDM)  
15 module 108. It can be appreciated, however, that the functions performed by these modules can be further separated into more modules, combined together to form one module, or be distributed throughout the system, and still fall within the scope of the invention. Further, although this embodiment of the invention implements the functionality of these modules in software, it can be appreciated  
20 that the functionality of these modules may be implemented in hardware, software, or a combination of hardware and software, using well-known signal processing techniques. The operation of these modules will be described in further detail later with reference to FIG 3.

In this embodiment of the invention, database 128 is a relational database  
25 storing data in hierarchical form. The data is extracted from database 128 by relational database management module 108. Design module 106 is used to organize data from the database into various design documents and overlays consistent with one or more performance terms.

Database 128 is a relational database storing information in a hierarchical  
30 format. Individual "cells" of information are stored in the database, with each

cell being connected to other related cells (e.g., peer cells, child cells and parent cells) by a link or pointer. The information within a cell and its links varies according to a particular product or system that is being designed. The product is broken down into separate components, with the components being broken down into separate elements, and so forth in a hierarchical manner to whatever level of  
5 granularity is desired. Each discrete part of the product is uniquely identified, and is referred to herein as a "product element." Each product element is stored in an individual cell used by database 128. An example will be described with reference to FIG. 2.

FIG. 2 illustrates a hierarchical model suitable for use with one embodiment  
10 of the invention. One example of a product that may be broken down into its product elements and organized into a hierarchical structure is a building. A building can be defined according to major construction assemblies which are arranged as a hierarchical relational list of building assembly descriptions of increasing specificity. At the highest level of the list is a facility description in  
15 substantially the broadest performance terms possible. Thus at the top of the hierarchy (Level One) is an element by element list of the major assemblies of all buildings, such as shell, services, interiors, and equipment and furnishings. The next level (Level Two), in one embodiment, describes systems within an assembly, as shown in FIG. 2. Thus the building shell element is described in  
20 terms of exterior enclosure and superstructure elements. Level Three of specificity describes different sub-systems of each system, for example, exterior walls, and exterior windows and other openings. Below this level (Level Four), the data include specific components such as windows, fixed glazing and ventilation openings. Finally, at the lowest level in this embodiment (Level  
25 Five), building elements such as operable windows, entrances and storefronts, and louvers, are included. In each case, the elements are described in terms of their performance.

In this embodiment of the invention, a building is decomposed into various product elements in a manner similar to an industry standard format promulgated  
30 by the Construction Specifications Institute (CSI) and Construction Specifications



Canada (CSC) and referred to as the CSI/CSC 1997 Draft UniFormat ("UniFormat"). It is worthy to note that although UniFormat was used to define product elements in this embodiment of the invention, any hierarchical definition of product elements can be used and still fall within the scope of the invention, such as the CSI/CSC 1998 version of UniFormat.

5        Each cell can contain many types of information or attributes to characterize a product element, such as a performance value, text segment, identifier, and so on. A performance value may be a qualitative or quantitative parameter. Examples of qualitative parameters might be that the building must conform to certain architectural requirements for a particular area, have a non-combustible  
10    outer shell, or that each product element must be aesthetically consistent with a brick facade. Examples of quantitative parameters might be an overall seismic resistance of the building, a value for thermal resistance for an exterior wall, a value for glass transmittance, and so forth. A text segment is defined as one or more words, phrases, or sentences which can be combined together to produce a  
15    particular document. In this embodiment of the invention, the text segments describe a building's technical requirements and, along with the performance values, are used to produce performance-based specifications for the building's systems and elements.

      The organization of product elements in a hierarchical manner serves at least  
20    two purposes. First, it creates a standard format and terminology that can be used to enhance communications between multiple entities. Second, it permits an entity to define a product in performance terms, thereby permitting multiple entities to build upon each other's work in a consistent and uniform manner. Both purposes will become more apparent during the description of the operation  
25    of design-build system 100, which occurs in the following sections.

      FIG. 3 is a block flow diagram of the steps performed by a design-build system in accordance with one embodiment of the invention. Design-build system 100 is capable of producing a design document for a product, with the product having product elements arranged in a hierarchical manner. System 100  
30    receives a selection for at least one product element at step 302. System 100 also

receives at least one performance value associated with the selected product element at step 304. System 100 then retrieves a text segment associated with each selected product element at step 306. A user selects which of the retrieved text segments are to be incorporated into the document at step 308. System 100 constructs the document using the selected text segments at step 310.

- 5 Referring again to the building industry, design-build system 100 permits a prospective owner to utilize the least detailed level of performance requirements compatible with the owner's needs. Thus for an advantageous design-build project, performance requirements of the RFP are described at the highest level. A prospective owner needing a greater degree of control over the finished product  
10 might describe needs at a higher level of specificity. Such an arrangement of the database enables the design-builder to improve upon the work of the owner and describe the proposed design solution in greater detail than the owner used to describe the requirements, still in performance terms, by drawing upon data from an appropriate level of the database. If the prospective owner's requirements  
15 statement is produced at the most detailed level available in the database, the design-builder may then produce a proposal in prescriptive terms.

Design-build system 100 permits different levels of specificity to be used to describe different parts of the building project. For example, a prospective owner may stipulate very general performance requirements for an element, for example  
20 a substructure, in combination with very detailed requirements for some other building components, for example particular interior finishes.

A user of the system produces a product description by choosing from the product elements offered from the database, and occasionally by adding to them. By selecting the desired elements, paragraphs of text describing the elements are  
25 accessed from the database. This text may then be edited as desired. Relational links between the elements, and hence among paragraphs of text are arranged to discourage incompatible choices or automatically include collateral requirements once basic decisions are made. Selectable system parameters allow the user to make global choices among printed-page formats and other features, such as units  
30 of measure and have those choices propagated through the document. Associated

with each option are help screens to accompany complicated text to be selected. In addition, the system is configured to permit evaluation of a proposal's solutions by performing an automatic comparison of the requirements at the present level with the requirements at a higher level.

In operation, to prepare a project document, the user first selects a project or starts a new project. From the project window, a table of contents is displayed and is organized by "volumes," which correspond to the assemblies of the product, general information about the project, and contractual information. The user can thus determine at a glance what assemblies have been included in the project. From this window, the user selects additional chapters to be included in the project. By selecting, for example by using a mouse, a chapter number or title, the data set level corresponding to the selected chapter is opened.

Text from the database is retrieved and can be scrolled and viewed like any document. However, in one embodiment, the text is not displayed like a document in a normal word processing environment. In this embodiment, each paragraph is in a text cell, similar to a spreadsheet, except that the text cell occupies most of the screen width. In this embodiment, and referring to the figures, the text hierarchy for each paragraph occupies a cell at the left edge of the screen. The current status of each paragraph is displayed, indicating whether it will be printed in the final document or not. Text that the user has selected is marked with an X. In addition, color coding of the text indicates how the text in the cell relates to other text in the document. In one embodiment, text that has been selected by the system is marked with a green box; text that is suggested as relevant by the system is marked with a yellow box; text that has been excluded by the system is marked with a red box; text that the user has excluded has half the status box blacked out.

Unlike documents from a typical word processing environment, chapters and projects in the present system feature "intelligent text." In order to create an edited document, the user selects text from the database and as the user makes text selections, the program automatically makes other changes to the chapter and to other chapters in the project as would occur in a spreadsheet rather than a

word-processing environment. Only valid active text, selected by the user or included automatically by the program, will be assembled into the final output. To be active, selected text must have an unbroken line of parentage originating with the chapter title. This means that any "orphaned" text, text whose pointers can not be retraced to the origin, will not be part of the final printed document.

- 5 From a main File menu, the user opens a Summary Information dialogue box. Here the user is able to make a number of global decisions that will affect how the document is formatted. The user is able to establish the units of measure to be used, the terms to be used for key entities, and other variables. The data in the database includes certain associated information in order for these global
- 10 variables to function as desired. For example:

	<u>VARIABLE</u>	<u>EXAMPLE</u>
	Document function	RFP, Proposal or Instructions
	Unit of measure	English or metric
15	Owner term	"owner" or "government"
	Design-builder term	name of the design builder
	Design professional term	name of
	Contractor term	name of contractor
	Project location (State)	state
20	Edition date (of standard)	date

- The switch "Document Function" permits the user to be able to define the function of the document once, changing all relevant language to reflect that function. In one embodiment, the values for the three functions are: Request for
- 25 Proposal, Design-builder's Proposal, or Instructions for Construction. By selecting one of these values, the relevant language will be inserted globally into the text of the RFP or the proposal by the software.

- The switch in the project summary dialogue box will set the appropriate option by selecting option 1, 2, or 3, designating whether the document is to
- 30 serve as an RFP or a proposal or instructions for construction. Samples of alternative language are as follows:

For an RFP: "Design and select materials to provide"

For a proposal: "Construction will provide"

If instructions for sub-contractor: "Provide"

User options and global settings have been coded in the sample text the same way  
5 they would need to be coded for conversion by the content provider. Below are  
additional coding conventions that are used within the sample:

Owner's Criteria Documents: Comply with applicable requirements of the  
following:

- 10        1.    BOCA National --and <<Building Code>> <<Fire  
Prevention Code>> <<Energy Conservation Code>>  
            <<[ ]>>--.
2.    ICBO Uniform --and <<Building Code>> <<Fire Code>>  
            <<[ ]>>--
- 15        3.    SBCCI Standard --and <<Building Code>> <<Fire  
Prevention Code>> <<Existing            Building Code>>  
            <<[ ]>>--.
4.    CABO Model Energy Code.
5.    [ ].
- 20        6.    [ ].

Within the database, a given paragraph (source paragraph) may be  
relationally linked to any number of other paragraphs (target paragraphs) both  
within the chapter and in other chapters. Only one link may exist from any  
25 source paragraph to a given target paragraph, but any paragraph may be the target  
of any number of links from multiple source paragraphs. Also, the links act in  
one direction only and do not result in reciprocal linkage. For example, a  
paragraph that automatically selects another paragraph will not be selected  
automatically if the target selection is chosen first; a separate link acting in the  
30 opposite direction would be necessary. In addition, the target paragraph may act  
on the first paragraph in a different way altogether, or not at all.

The presence of the type of link determines whether text is selectively  
excluded or flagged as pertinent. Because a given target paragraph may be acted

upon by several links of different types (from a number of source paragraphs), the text status and related display modes are governed by a hierarchy of consequences resulting from a selection. Specifically:

1. Any text may be selected manually at any time, which overrides any links.
2. Any text may be excluded manually at any time, which also overrides any links.
3. If not selected or excluded manually but acted upon by one or more links of the same type, the status will correspond to that associated with the link type: (Yes, No, or flagged as pertinent).
4. If not selected or excluded manually but acted upon by more than one type of link, text status will be determined by the following hierarchy, from most to least controlling: (No, Yes, flagged as pertinent).
5. If not selected, excluded, or acted upon by any links, the text will be available for selection by the user.

Thus, a single "No" link will override any number of "Yes" or flagged links and a single "Yes" link will override any number of flagged links. Also, because status of a particular paragraph is dependent upon the net effect of all currently active links, removal of a particular link by deselection of the source text may result in a change in the status of the target paragraph. The software calculates the current status of each paragraph after each change in status of any paragraph and displays the active paragraphs on a white background for ease of identification.

The data format (in one embodiment CSI's UniFormat as adapted) accommodates virtually any type of building. In one embodiment, the content for a North American commercial project in a temperate or tropical climate, includes the International Conference of Building Officials (ICBO), Building Officials and Code Administrators International, Inc. (BOCA), or Southern Building Code Congress International, Inc. (SBCCI) model building codes either as regulatory requirements or incorporated by reference into the requirements. This code assumption provides a body of basic performance requirements which does not

need to be repeated in the database. In other embodiments Canadian and major State codes are included.

The first display screen of the database is arranged as a series of "tabs" denoting major document volumes. The volumes start with 0 for Project information; tab A through G for the major building and site elements; tab X, referred to as volume X, which includes product information organized into 16 divisions, and a final tab Z, which includes contract information. In one embodiment the Master Format of the Construction Specification Institute is used to organize the contents of volume X. The hierarchical levels are referred to as assemblies (Level 1), systems (Level 2), subsystems (Level 3), and components (Level 4). Within each volume are chapters that may be used as separate documents. That is, chapter 0 contains the overall project description and the most fundamental performance requirements. Volumes A-G and 0 correspond to Level 1.

The first chapter in each volume contains the requirements that need to be defined at the assembly level. A requirement is defined at the volume or assembly level if the requirement can be stated as "All \_ [a] must be [b] \_" or "No \_ [a] - may be \_[b] \_" where [a] is the name of the volume and [b] is the requirement. For example, if the entire shell of the building must be non-combustible, that would be stated at the assembly level in [b], assuming that a reference to the building code in volume 0 did not accomplish the same purpose.

If the requirement is such that not all of [a] is governed by the same requirement, but [a] can be divided into sections of the same type for which [b] is always the same, the requirement is still stated at the assembly level. For example, if one building in the project must have a completely non-combustible shell, but another need not have, such a requirement is stated at the assembly level. However, if as is more likely, the parts of [a] that are different are actually the systems within the assembly, the requirement should be stated at the system level. For example, the superstructure may need to be non-combustible but the exterior enclosure may not need to be. In that case, the requirement for each system would be stated at the system level under the system title. The initial

chapter in each volume is titled the same as the volume and is organized into performance; products (acceptable and unacceptable); and methods of construction (acceptable and unacceptable).

For each sub-system (Level 3) heading there is a location in which subsystem and component level requirements are stated. The same principles  
5 apply as described for assembly and system level requirements. Thus each subsystem chapter is titled with the subsystem name and is organized in a similar manner: performance; products, and methods of construction. The system organizes segments of text by viewing levels and allow the user to view a level of detail.

10 In the system one or more statements of requirements is necessary for each element of the building and site. The requirements include the owner's definition of the building and the substantiation is whatever the owner wishes to receive showing that the proposal meets the requirements. An appropriate statement of acceptable substantiation is necessary for each requirement.  
15 Depending on the element, the requirements may be stated in performance terms or prescriptive terms or a combination of both. The substantiation can range from nothing at all to very detailed documentation, and submission of it may be specific to occur at the proposal stage, the design stage, or the construction stage. In addition, the user of the system is able to omit all substantiation statements and  
20 still be able to produce a contract document that can be enforced at the construction stage.

For many intangible requirements, it is not only difficult to determine what is an adequate performance requirement but identifying a practical method of substantiation may be almost impossible. In such a case, prescriptive  
25 requirements are stated giving a range of options from which the design-builder can choose or listing options that are not acceptable. Some examples of such substantiation include but are not limited to: (1) a statement by the design-builder that the design will comply with the requirements (which is usually incorporated into the terms of the proposal); (2) a statement that acceptance by the owner of  
30 alternative proposed products is indicated by incorporating the proposal into the



contract documents; (3) a submittal of manufacturer's product literature or samples; (4) a submittal of certifications based on factory testing; and (5) a submittal of a manufacturer warranty.

FIG. 4 illustrates various overlays in accordance with one embodiment of the invention. Database 128 stores information in a hierarchical relational manner. Once a user has utilized system 100 to produce a new design document, that is, has selected the product elements and performance values to his or her desired level of granularity, reference information for the new document is stored in an electronic project file ("overlay"). By storing reference information for the new design document, rather than the actual design or product data, the size of the electronic file is reduced. This means that the amount of bandwidth required to transfer the new document is reduced. In this embodiment of the invention, the reference information for each overlay includes a series of codes and pointers that RDM module 108 can use to extract actual data for the design document from database 128. In other words, an overlay operates as a template for an underlying database.

Thus, each overlay can be sent in electronic form between entities involved in the design process, such as the owner entity, design-build entity and materials supplier entity. As long as each entity utilizes design system 100, each entity can access the appropriate data set from database 128 using the overlay. This minimizes the amount of data necessary for transmission between entity devices, while maintaining the capability of multiple entities to contribute to the design process by modifying the overlay appropriately.

FIG. 5 is a block diagram of a design system in accordance with one embodiment of the invention. FIG. 5 illustrates a design system 500 comprising a first design-build system 502, a second design-build system 506, and a network 504 connecting systems 502 and 506. Design-build systems 502 and 506 are similar to design-build system 100. Network 504 can be any network suitable for transferring data, such as a packet-switched network operating in accordance with a transport control protocol/internet protocol (TCP/IP).

Systems 502 and 506 pass a project overlay between them, with a first

overlay 508 representing the owner's performance requirements for a building (e.g., RFP), a second overlay 510 representing the design-build entity's detailed specification designed using first overlay 508, and a third overlay 512 representing instructions to the materials supplier. The operation of design system 500 will be further described with reference to FIG. 6.

5           FIG. 6 is a block flow diagram of the steps performed by a design system in accordance with one embodiment of the invention. As shown in FIG. 6, an owner entity constructs first overlay 508 for a performance database using system 502 at step 600. First overlay 508 is sent to system 506 via network 504 at step 602. System 502 receives second overlay 510, which in this embodiment of the  
10          invention has been constructed by the design-build entity using system 506. System 502 retrieves the underlying data in accordance with the first and second overlays at step 606, and displays (e.g., using monitor 126) each data set for review by the owner entity at step 608.

          At step 600, system 502 constructs first overlay 600 by first receiving a  
15          selection for at least one first product element. The first product element could be a substructure, foundation, basement, and so forth. A performance value is received for the first product element. The performance value may be a qualitative or quantitative parameter as described previously. For example, the performance value may be that the foundation must be able to support the  
20          building without settling for 50 years. A representation for the first product element, or alternatively the product element data itself, and the associated performance values are then stored in electronic form.

          Second overlay 510 is constructed as follows. System 506 receives first overlay 508 from network 504. System 506 uses first overlay 508 to extract data  
25          from database 128, including any product elements and their associated performance values. Using the product elements, a design-build entity can use system 506 to build upon the work accomplished by the owner entity which is represented by the first overlay, by retrieving one or more second product elements that comprise a portion of the first product element (e.g., are linked to  
30          the first product element) and which are consistent with the associated

performance values. For example, if the first product element was a foundation capable of supporting a certain weight, a design-build entity could use system 506 to select from among different types of foundations, such as standard foundations, other foundations, or slabs on grade, that are capable of sustaining the requisite weight. In addition, the global switch may be used to convert the text fragments  
5 associated with the first product elements to convert the text to language appropriate for the design-build specification. A second representative for the selected second product elements, or the second product elements data, is then stored in electronic form along with the first overlay and performance values.

In addition to displaying the data sets for the first and second overlay, this  
10 embodiment of the invention also compares the data sets to ensure each of the first product elements and performance values include a corresponding second product element. That is, if a certain performance requirement has not been given any treatment by the design-build entity, e.g., no second product elements were selected to more specifically define the first product elements, then system  
15 502 will indicate the lack of treatment for the owner-entity to factor into his or her evaluation of the second overlay data set.

Once the owner-entity accepts the design-build specification represented by the second overlay, which may take several iterations of transferring the first and second overlays between systems 502 and 506, a third overlay is constructed  
20 for the materials supplier entity. The global switch is used to convert the language from language appropriate for the design-build entity to language appropriate to the materials supplier entity. The converted information is stored in electronic form, and sent to the materials supplier entity or materials supplier entity system. In the latter case, the materials supplier entity system could  
25 retrieve a third set of data from database 128 corresponding to the third overlay, and display the third set of data for use by the materials supplier entity.

FIG. 7 is a block diagram of a design system having multiple design-build entities in accordance with one embodiment of the invention. As shown in FIG. 7, a first design-build system 702 is in communication with a second design-build  
30 system 706, a third design-build system 708 and a fourth design-build system

710, via network 704. The owner entity using system 702 constructs a first overlay 714 and sends it to systems 706, 708 and 710. Systems 706, 708 and 710 each send back second overlays 712, 716 and 720, respectively. Data sets corresponding to second overlays 712, 716 and 720 are retrieved by system 702, compared to ensure at least one second product element corresponds with each first product element of first overlay 718, and displayed. Each data set for the first overlay is compared to the second overlay to determine whether any of the second overlays did not include the selection of a second product element to further define a first product element represented in the first overlay. Further, the first data set and second data sets are arranged such that each performance requirement set forth in the RFP is aligned with its corresponding response in each design-build specification, thereby allowing the owner entity to conveniently compare the multiple responses.

Although various embodiments are specifically illustrated and described herein, it will be appreciated that modifications and variations of the present invention are covered by the above teachings and within the purview of the appended claims without departing from the spirit and intended scope of the invention. For example, although information is passed between design-build systems using a network 104, it can be appreciated that information could also be passed between systems in more conventional methods using optical or magnetic storage media, and still fall within the scope of the invention. Further, although the design elements used in describing various embodiments of the invention were in terms of performance requirements used in the design and construction of a building, it can be appreciated that the product elements can describe any product for any industry and still remain within the scope of the invention.

25

What is claimed is:

- 1 1. A method for designing a product, comprising:  
2 constructing a first overlay for a performance database at a first device;  
3 sending said first overlay to a second device;  
4 receiving a second overlay for said database from said second device;  
5 retrieving a first set of data from said database corresponding to said first  
6 overlay, and a second set of data from said database corresponding to said second  
7 overlay; and  
8 displaying said first and second sets of data.
- 1 2. The method of claim 1, wherein said constructing comprises:  
2 receiving a selection for at least a first product element from a first set of  
3 product elements;  
4 receiving at least one performance value for said first product element;  
5 and  
6 storing a first representative for said first product element and said  
7 performance value in electronic form.
- 1 3. The method of claim 2, wherein said receiving said second overlay  
2 comprises:  
3 receiving said first overlay at said second device;  
4 constructing said second overlay using said first overlay; and  
5 sending said second overlay to said first device.
- 1 4. The method of claim 3, wherein constructing said second overlay  
2 comprises:  
3 retrieving said first product element and said performance value from said  
4 first overlay;  
5 retrieving at least one second product element from a second set of  
6 product elements, said second product element comprising a portion of said first  
7 product element and consistent with said performance value; and

8 storing said first representative and performance value with a second  
9 representative for said second product element in electronic form.

1 5. The method of claim 4, further comprising:  
2 comparing said first and second sets of data to ensure each of said first  
3 product elements includes a corresponding second product element; and  
4 indicating each of said first product elements not having a corresponding  
5 second product element.

1 6. The method of claim 1, further comprising:  
2 constructing a third overlay;  
3 sending said third overlay to a third device;  
4 retrieving a third set of data from said database corresponding to said third  
5 overlay; and  
6 displaying said third set of data.

1 7. The method of claim 6, further comprising:  
2 receiving a fourth overlay at said first device;  
3 retrieving a fourth set of data from said database corresponding to said  
4 fourth overlay;  
5 comparing said first and fourth sets of data to ensure each of said first  
6 product elements includes a corresponding second product element;  
7 indicating each of said first product elements not having a corresponding  
8 second product element; and  
9 displaying said first, second and fourth sets of data.

1 8. A method for producing a design document for a product, the product  
2 having product elements arranged in a hierarchical manner, comprising:  
3 receiving a selection for at least one product element;  
4 receiving at least one performance value associated with said selected  
5 product element;

1        retrieving a text segment associated with each selected product element;  
2        receiving a selection for at least one of said retrieved text segments; and  
3        constructing the document from said selected text segments.

1    9.     A computer-readable medium whose contents cause a computer system to  
2    assist in designing a building, the computer system having a design program and  
3    a relational database management program that when executed performs:  
4        constructing a first overlay for a performance database at a first device;  
5        sending said first overlay to a second device;  
6        receiving a second overlay for said database from said second device;  
7        retrieving a first set of data from said database corresponding to said first  
8    overlay, and a second set of data from said database corresponding to said second  
9    overlay; and  
10       displaying said first and second sets of data.

1    10.    The computer-readable medium of claim 9, wherein said constructing  
2    performs:  
3        receiving a selection for at least a first product element from a first set of  
4    product elements;  
5        receiving at least one performance value for said first product element;  
6    and  
7        storing a first representative for said first product element and said  
8    performance value in electronic form.

1    11.    The computer-readable medium of claim 10, wherein said receiving said  
2    second overlay performs:  
3        receiving said first overlay at said second device;  
4        constructing said second overlay using said first overlay; and  
5        sending said second overlay to said first device.

1 12. The computer-readable medium of claim 11, wherein said constructing  
2 said second overlay performs:  
3 retrieving said first product element and said performance value from said  
4 first overlay;  
5 retrieving at least one second product element from a second set of  
6 product elements, said second product element comprising a portion of said first  
7 product element and consistent with said performance value; and  
8 storing said first representative and performance value with a second  
9 representative for said second product element in electronic form.

1 13. The computer-readable medium of claim 12, further performing the steps  
2 of:  
3 comparing said first and second sets of data to ensure each of said first  
4 product elements includes a corresponding second product element; and  
5 indicating each of said first product elements not having a corresponding  
6 second product element.

1 14. The computer-readable medium of claim 9, further performing the steps  
2 of:  
3 constructing a third overlay;  
4 sending said third overlay to a third device;  
5 retrieving a third set of data from said database corresponding to said third  
6 overlay; and  
7 displaying said third set of data.

1 15. The computer-readable medium of claim 14, further performs:  
2 receiving a fourth overlay at said first device;  
3 retrieving a fourth set of data from said database corresponding to said  
4 fourth overlay;  
5 comparing said first and fourth sets of data to ensure each of said first  
6 product elements includes a corresponding second product element;



1           indicating each of said first product elements not having a corresponding  
2 second product element; and  
3           displaying said first, second and fourth sets of data.

1 16.    A computer-readable medium whose contents cause a computer system to  
2 assist in producing a design document for a product, the product having product  
3 elements arranged in a hierarchical manner, and the computer system having a  
4 design program and a relational database management program that when  
5 executed performs:  
6        receiving a selection for at least one product element;  
7        receiving at least one performance value associated with said selected  
8 product element;  
9        retrieving a text segment associated with each selected product element;  
10       receiving a selection for at least one of said retrieved text segments; and  
11       constructing the document from said selected text segments.

1 17.    An apparatus for producing a design document, comprising:  
2        a relational database having product elements arranged in a hierarchical  
3 manner, with said product elements having associated performance values and  
4 text segments;  
5        a relational database management system in communication with said  
6 relational database;  
7        a design module in communication with said relational database and said  
8 relational database management system, said design module producing the design  
9 document using preselected performance values and text segments.

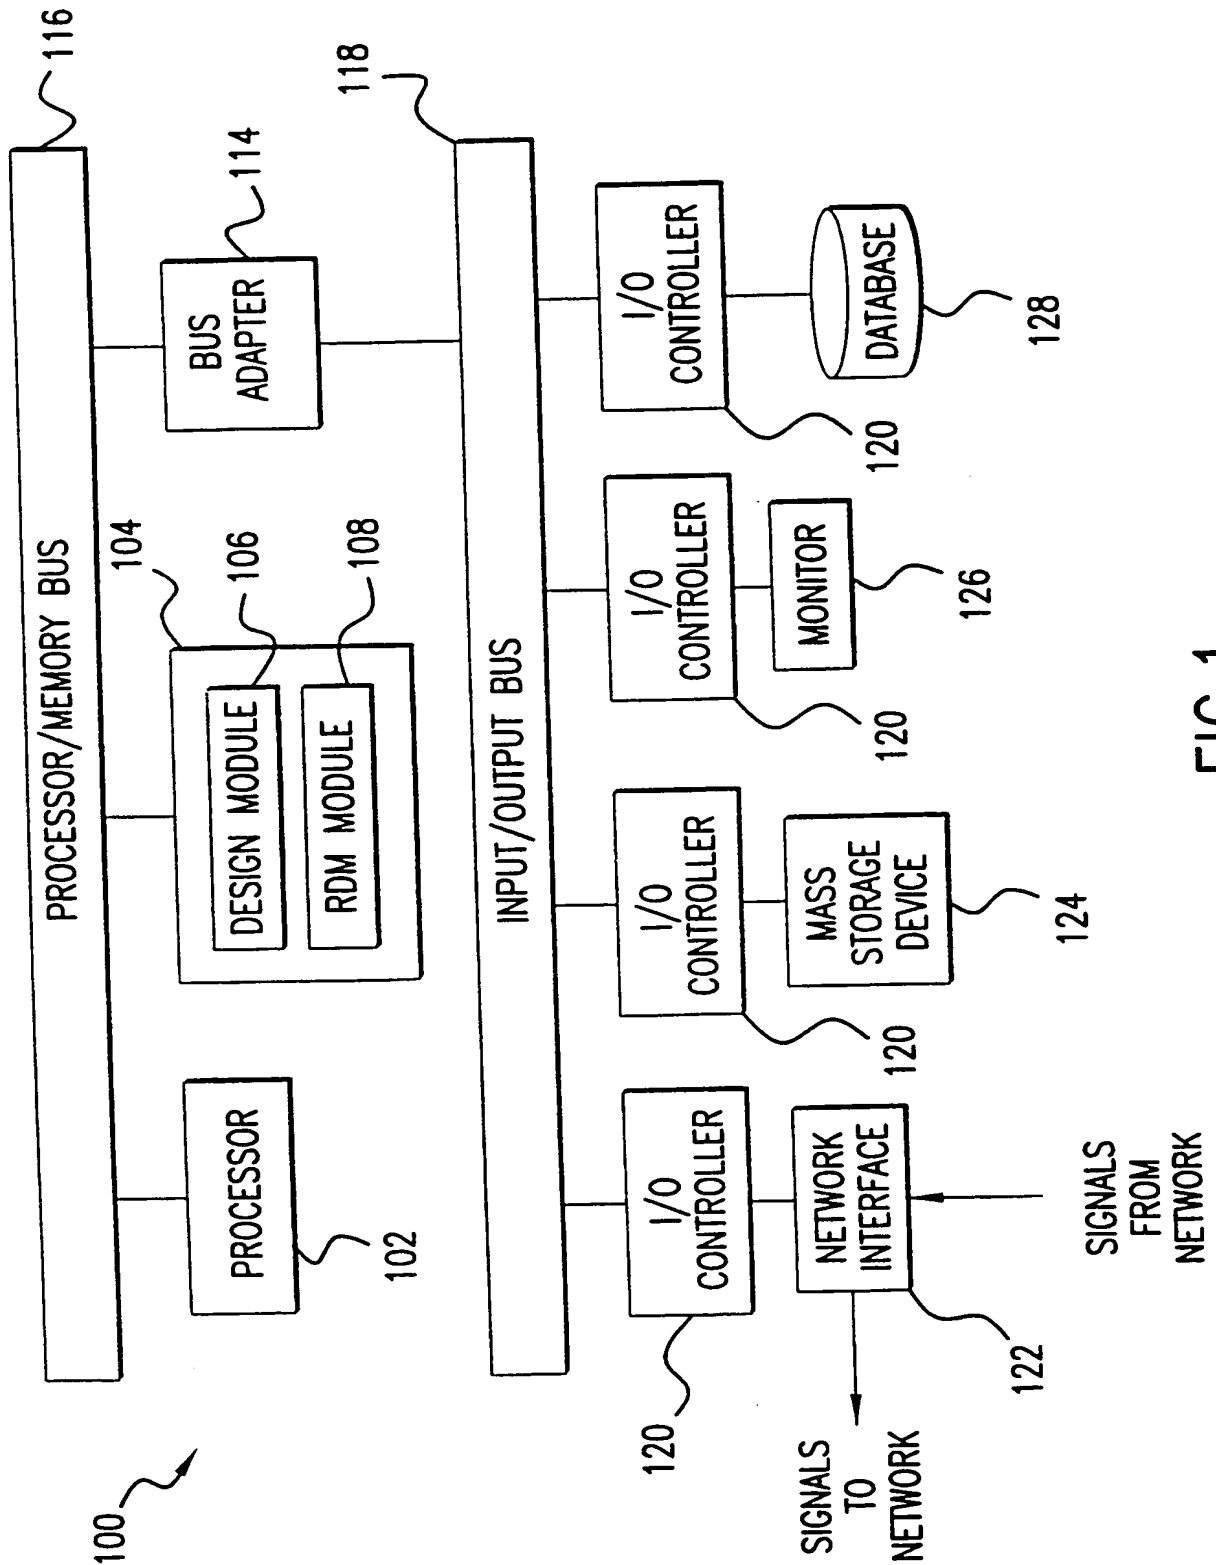


FIG.1

2/7

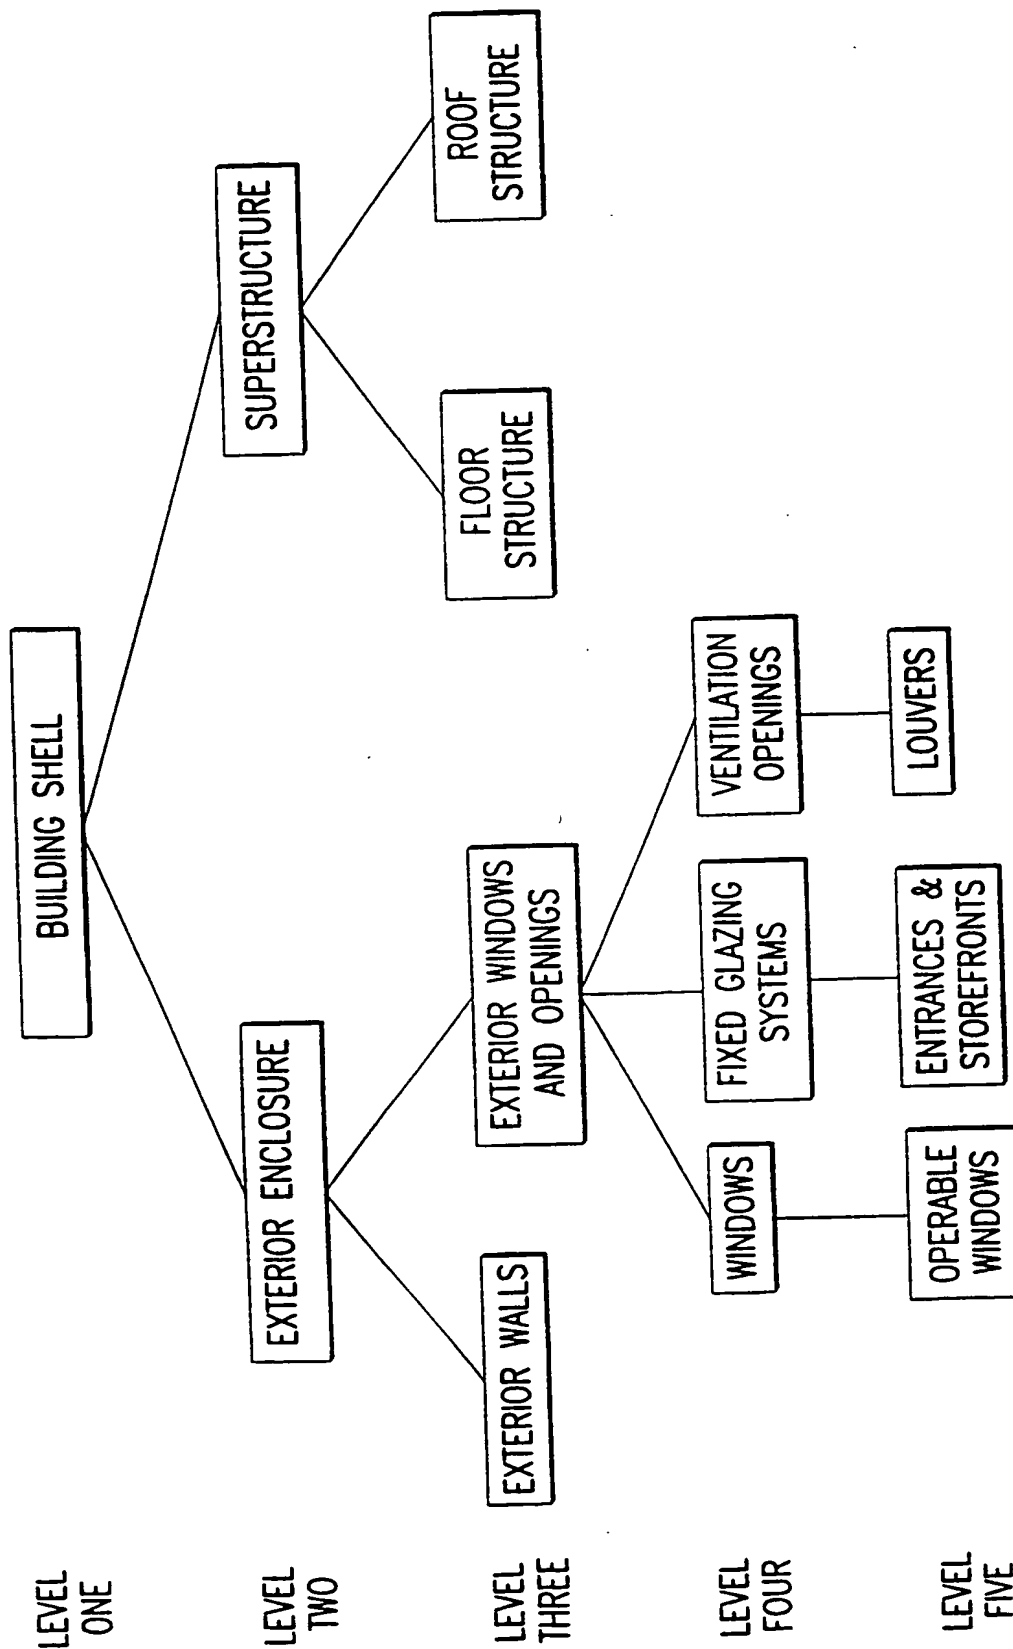


FIG.2

3/7

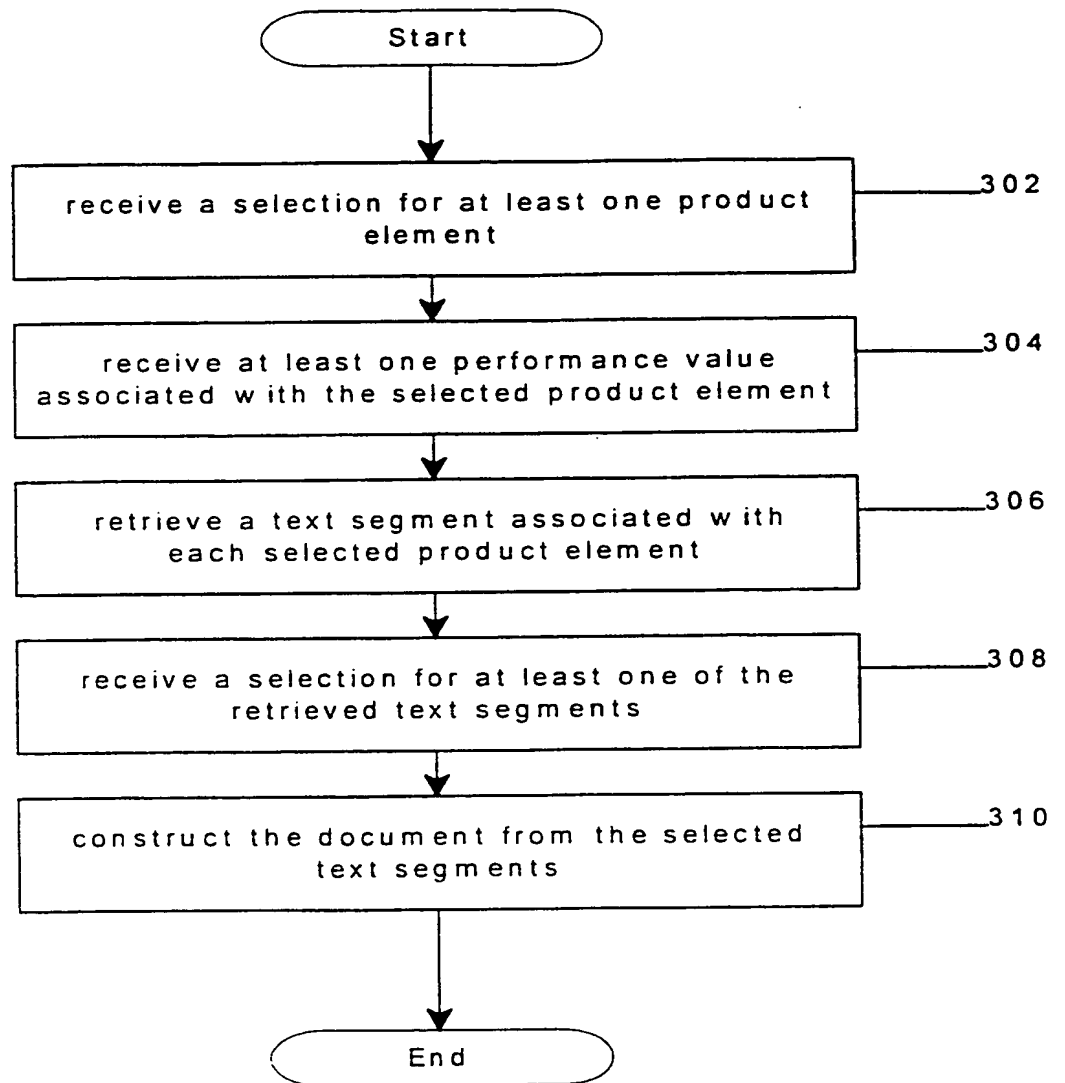


FIG. 3

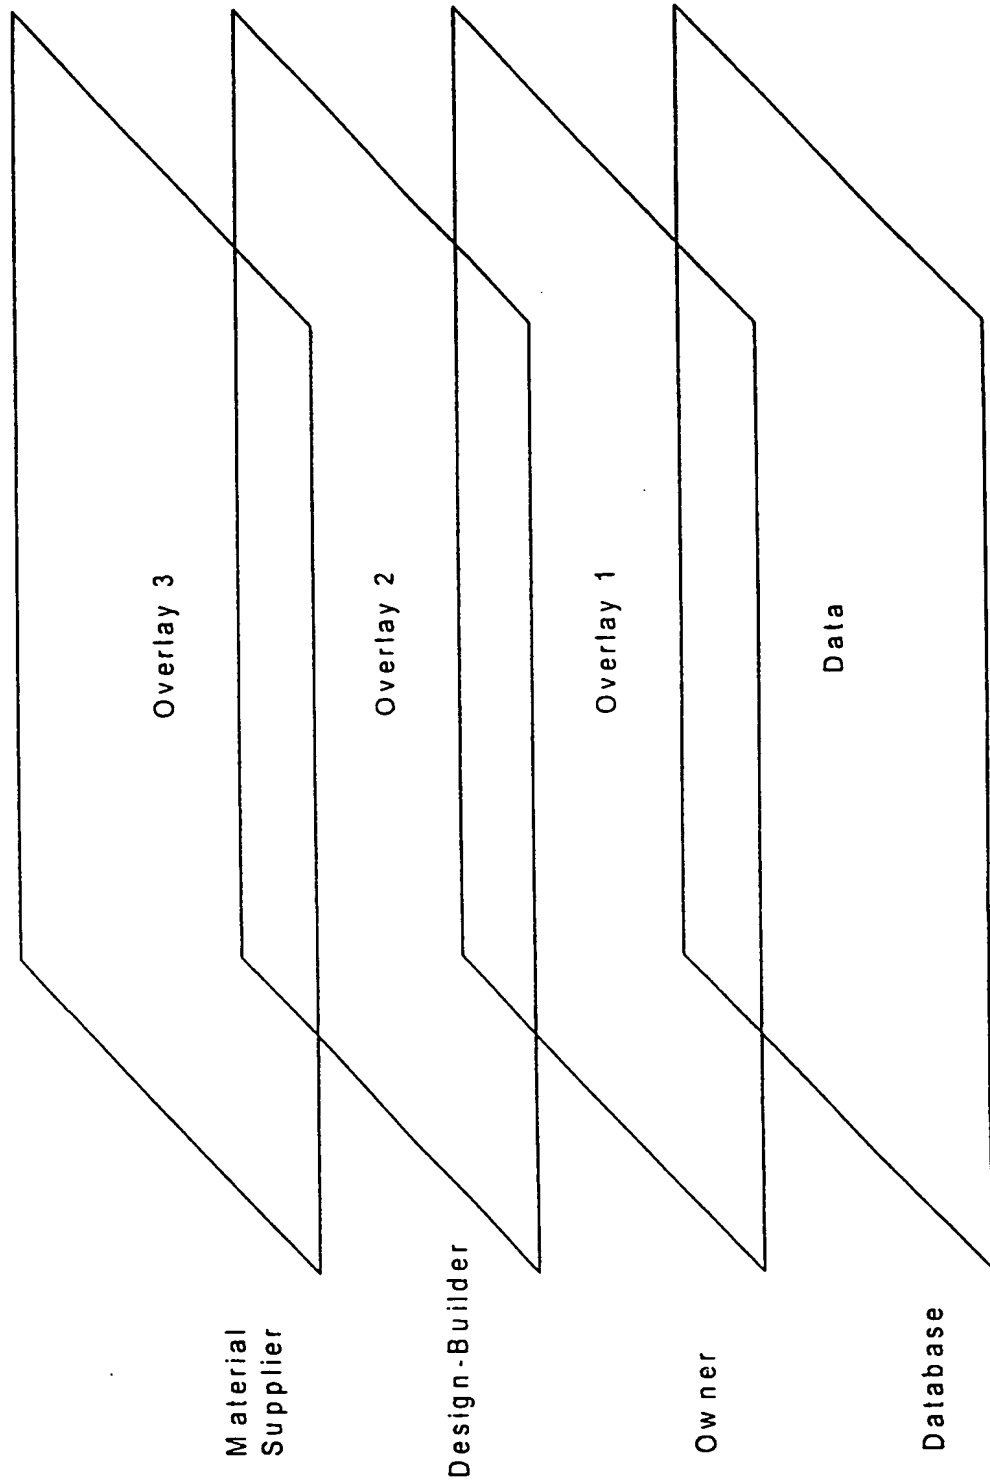


FIG. 4

5/7

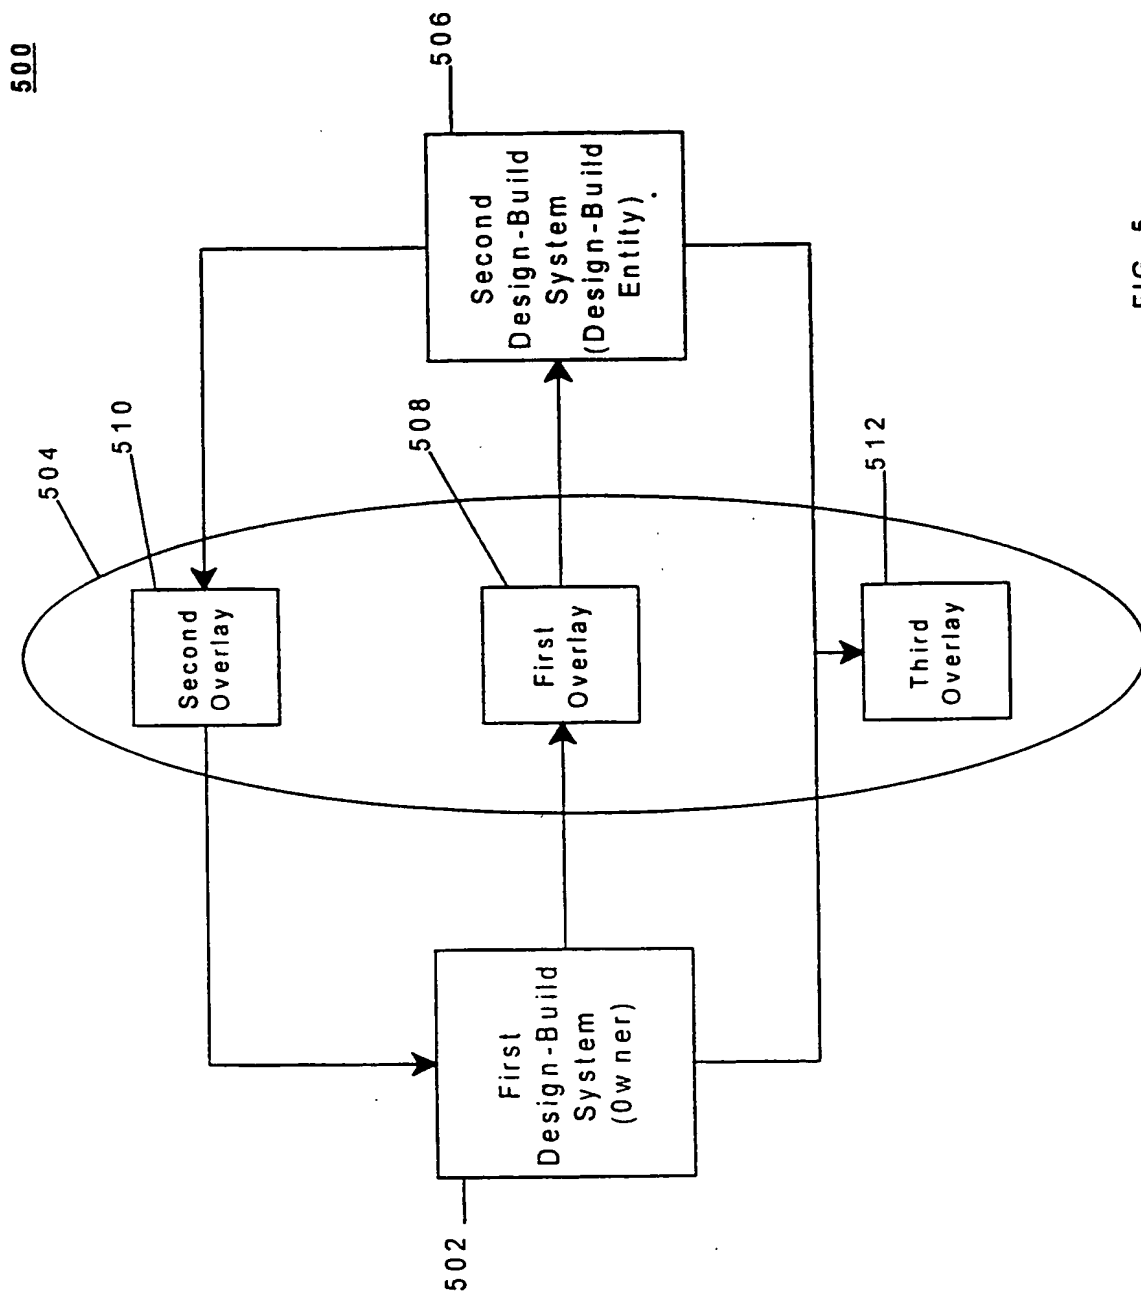


FIG. 5

6/7

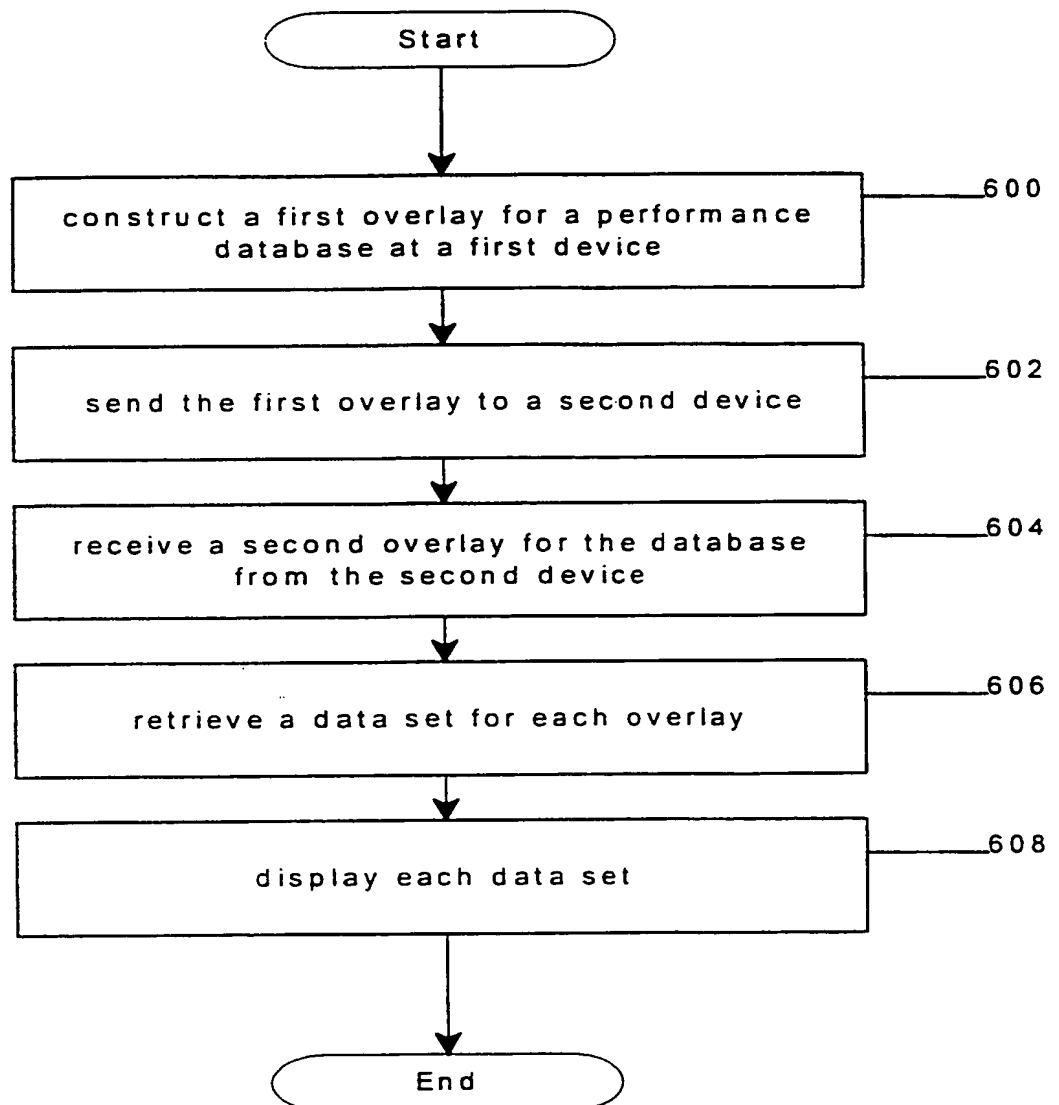


FIG. 6

7/7

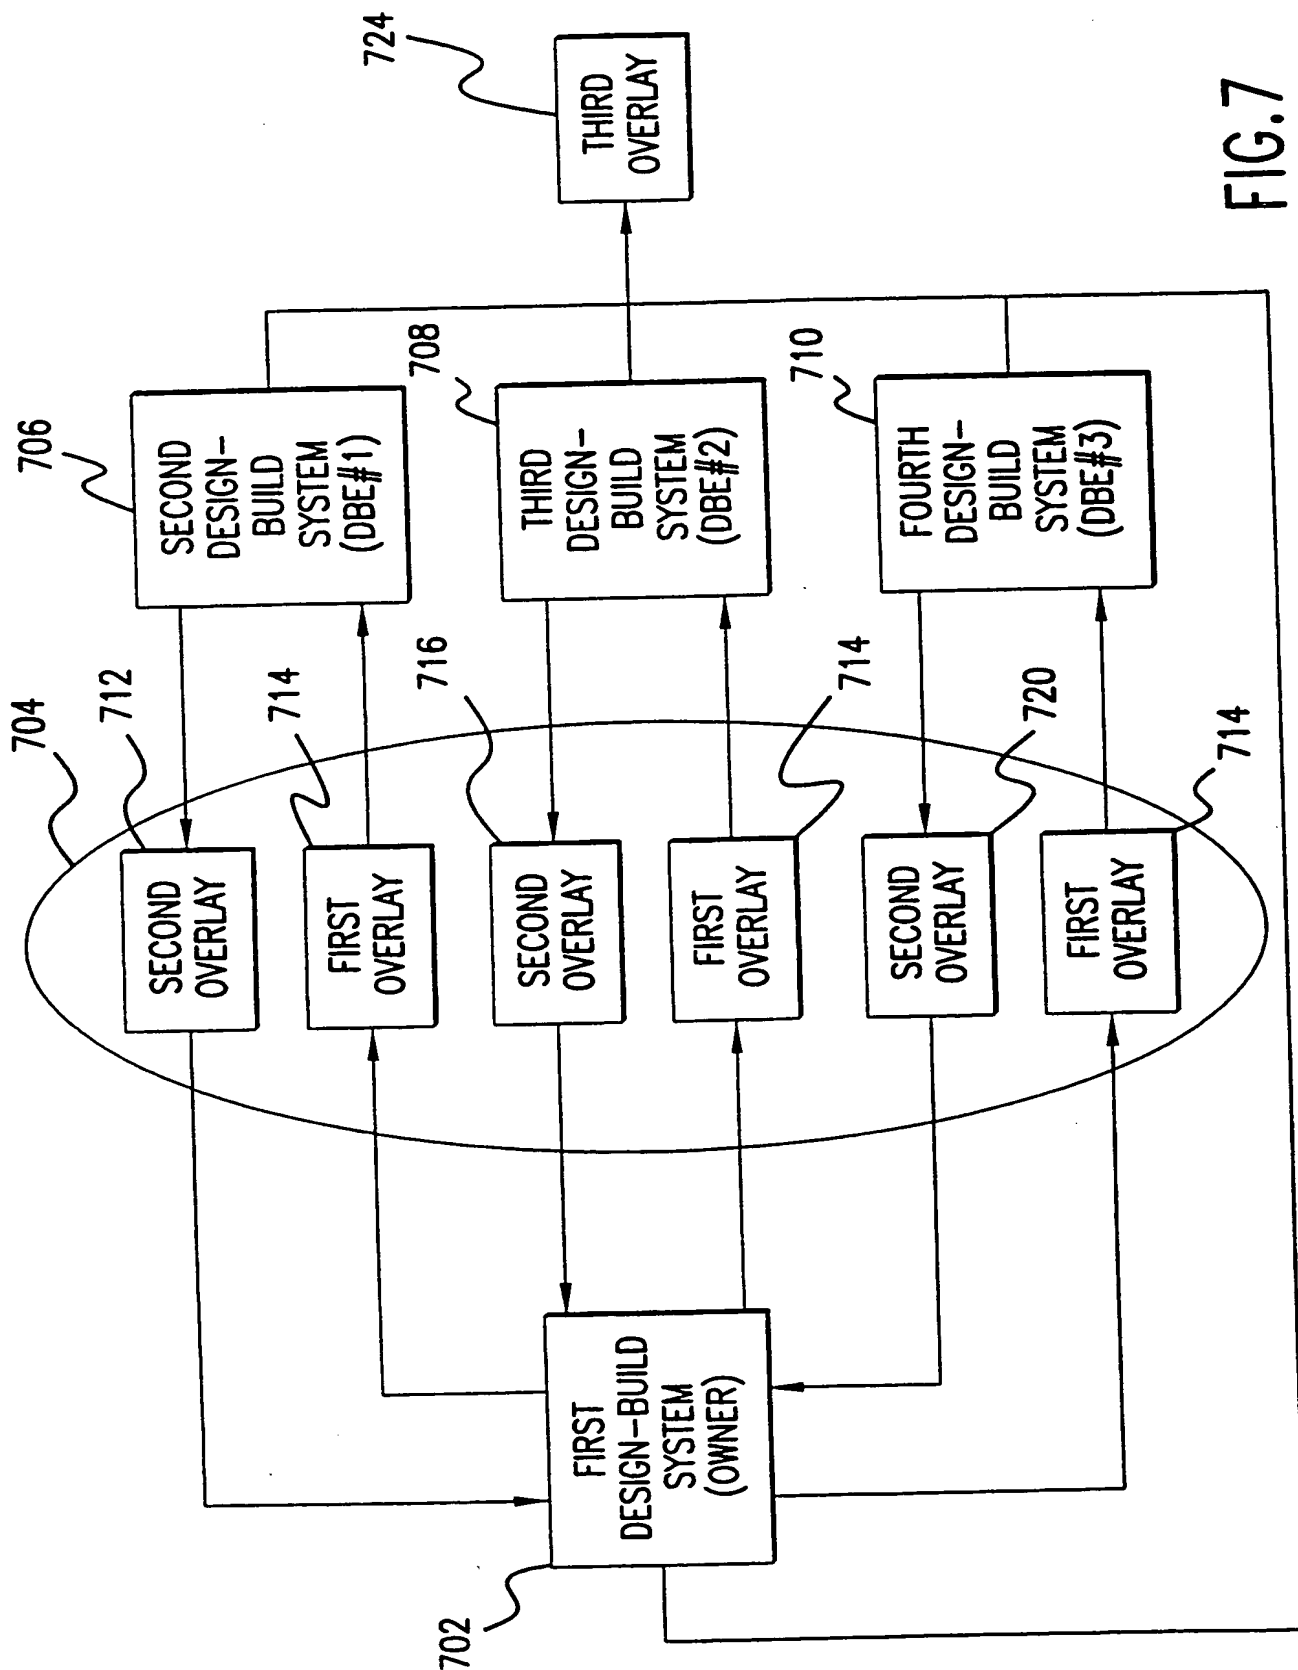


FIG. 7



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/12986

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : Please See Extra Sheet.

US CL : 364/468.03, 468.04, 468.06, 468.07, 468.08, 468.09

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 364/468.03, 468.04, 468.06, 468.07, 468.08, 468.09; 707/100

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — Y	US 5,109,337 A (FERRITER ET AL) 28 APRIL 1992, SEE ENTIRE DOCUMENT, ESPECIALLY ABSTRACT.	1-7, 17 ----- 9-16
X	US 4,875,162 A (FERRITER ET AL) 17 OCTOBER 1989, SEE ENTIRE DOCUMENT, ESPECIALLY ABSTRACT	8
Y, P	US 5,740,425 A (POVILUS) 14 APRIL 1998, SEE ENTIRE DOCUMENT, ESPECIALLY ABSTRACT.	9-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*E"	earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*O"	document referring to an oral disclosure, use, exhibition or other means	
*P"	document published prior to the international filing date but later than the priority date claimed	*G* document member of the same patent family

Date of the actual completion of the international search

28 SEPTEMBER 1998

Date of mailing of the international search report

30 OCT 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CAROLYN T. BAUMGARDNER

Telephone No. (703) 306-4768

**INTERNATIONAL SEARCH REPORT**

International application No.  
PCT/US98/12986

**A. CLASSIFICATION OF SUBJECT MATTER:**

IPC (6):

G06F 19/00

G06G 7/66

**B. FIELDS SEARCHED**

Electronic data bases consulted (Name of data base and where practicable terms used):

APS

search terms: database, overlay, template, performance, display, computer readable medium, computer system, management program, design document/specification, text segment, relational database